


RED INDICATES ORIGINAL

ONE PAGE	DATA CONTAINED IN THIS DOCUMENT IS RESTRICTED TO THE USE OF THE ARMY AND IS NOT TO BE DISCLOSED, COPIED, OR REPRODUCED IN ANY MANNER WITHOUT APPROPRIATE AUTHORITY.	REVISIONS			I-0448		SH 1
C		REV	ED	DESCRIPTION	OWN	APPROVED	DATE
		M	10686	.830 DIA WAS .810 DIA; GENERAL USAGE; SEE BCU	OKI	Em: PG	10/1/78

DASH NO	FIG	CABLES ACCUMULATED	ASSEMBLY FR.
-1	1.3	RT-59	TAI-101
-01		ESSCX 521 715	
-2		RG-59	
-D			
-24		BELDEN 827U	
-124			
-28			
-L28		W.F.CO. 730A	
-3			
-D		RG-223	
-3A			
-L3A		RG-55	
-4		85-122	
-14		BELDEN 8218	
5		SG-174	
-L6		RG-187	
-5A			
-L5A		RG-116F	
-5B		NEWELL-PAULSEN	
-L5B		B12D-11C7	
-21			
-121		RG-303	
-22			
-L22		RG-180	
-31	GRIMMAN 6875041		
-131	W-187 DBL S-10		
-34			
-134	BELDEN 822B		
-38	275-3931 MILA007		
-135	B15-5241 AMPEX		
-41	RG-504, B4 DFN		
-141	B240, B274, B738		
-44	GRAND-REX 8748		
-U44	CUMC-108C032		
-53			
-L53	88555 DD.DDN		
-63			
-U63	744A, AT&T		
-65	2	RG-405	TAI-130
-L65			
-165		RG-402	
-U165			

FIG 1 
- 1 SHOWN

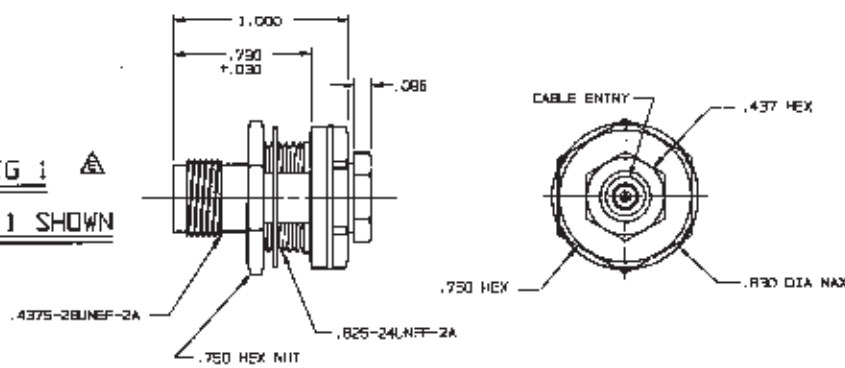

INCH	MM
0.05	0.13
0.10	0.25
0.15	2.44
1.25	3.18
1.87	4.75
2.50	6.35
3.21	7.14
3.94	7.21
4.75	7.92
5.57	11.15
6.35	16.02
7.14	18.13
7.92	19.03
8.63	20.07
9.37	21.09
10.00	24.45
1.406	35.71
1.946	49.03

FIG 2
- 086 SHOWN



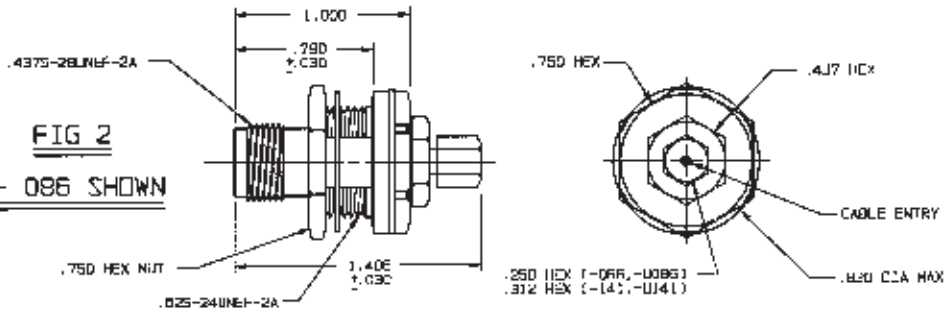


FIG 3 
- 1 SHOWN

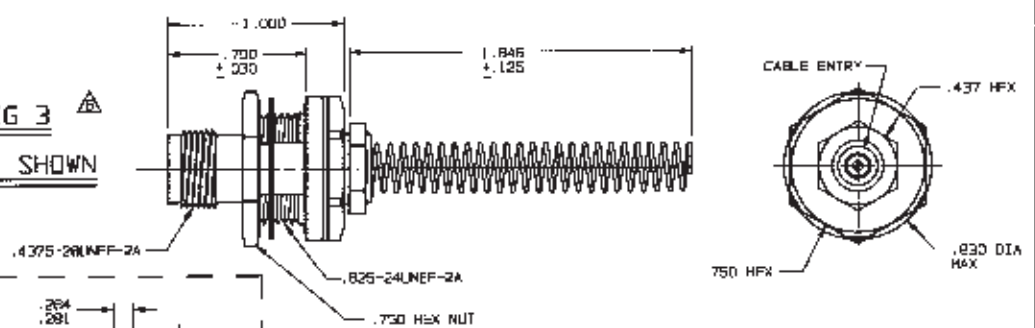

 IF HBAU ME_1BF SPRING REQUIRED (FCN 3)
AND SLF=IX *BR* TO MODEL NO (NOT AVAILABLE WITH
CABLE GROUPS -G3, -J3, -D38, -U038, -L41 & U141)

5. FEMALE TYPE TWO COAXIAL INSULATED BULKHEAD JACKS BOTH 50 & 75 OHM VERSIONS
4. MAX PANEL THK .187
3. DASH NO DENOTES LAULÉ GROUP EXCEPT "U" PREFIX DENOTES 75 OHM VERSION
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES



GTY		DESCRIPTION		PART NUMBER		LIB	
TOL UNLESS SPECIFIED				BJA40A.R.45 BJA40C.R.45.R4ER			
.005 .004 X .0006 .00005 .00005							
.005 00217		DWN		UIC		31-30-04	
.005-0023		THK		.004		1-5-95	
.005-1018		ENGR		SCALE 2/1		DATE 1/17/78	
.005-0052		APPR		11-1-95		SHEET 3 OF 3	
NEXT ASSY						REV H	