

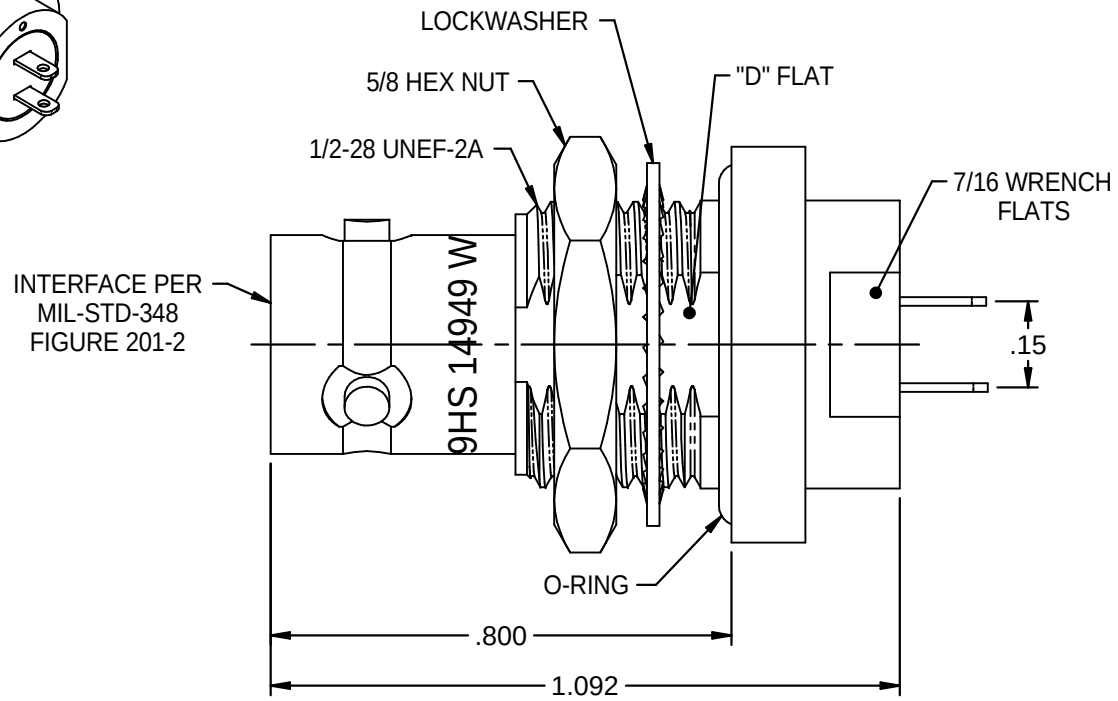

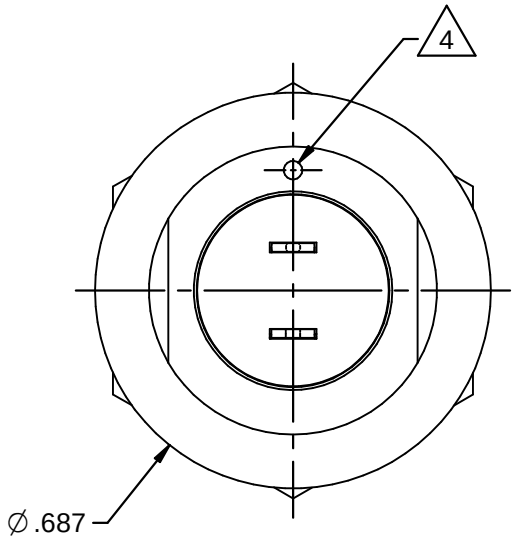

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIALS AND FINISH:
   1.1 BODY: PASSIVATED STAINLESS STEEL
   1.2 OUTER INSULATOR: PTFE
   1.3 INTERMEDIATE CONTACT: PASSIVATED STAINLESS STEEL
   1.4 DIELECTRIC: PTFE
   1.5 CENTER CONTACT: GOLD OVER BeCu
   1.6 TERMINALS: GOLD OVER BeCu
   1.7 HARDWARE: NICKEL OVER COPPER ALLOY

2. ELECTRICAL:
   2.1 IMPEDANCE: NON-CONSISTENT
   2.2 FREQUENCY: 500 MHz MAXIMUM

3. MAX PANEL THICKNESS: .160

4. PANEL NUT TORQUE: 35 INCH POUNDS MAXIMUM

5. LEAKAGE RATE: 1 X 10^-8 ATM CC/SEC MAXIMUM OF INERT GAS (HELIUM) IAW MIL-STD-1344, REV A, METHOD 1008, TEMP. RANGE -45.6°C TO +71°C.

△6. DIMPLE INDICATES CENTER CONTACT TAB.

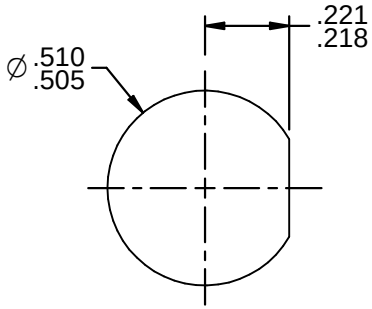

RECOMMENDED PANEL CUTOUT

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

3RD ANGLE PROJECTION

RoHS ☑ 2002/95/EC

UNLESS OTHERWISE SPECIFIED
UNITS: INCH
.XX ±.02
.XXX ±.005
ANGLES ±2°

Trompeter

Title: BULKHEAD JACK HERMETIC SEAL, TRB, THREADED

Model No. BJ79HS

Size	DO NOT SCALE DRAWING	Date:	Sheet 1 of 1
A		6/19/2013	

Please read our datasheet & drawing disclaimer here.