RED INDICATES ORIGINAL

CWG SIZE	DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.
C	

REVISIONS				3-0293	SH 1
REV	ECO	DESCRIPTION	DWN	APPROVED	DATE
A		PRODUCTION RELEASE	OKC		

INCH	MM
.0010	0.025
.005	0.13
.013	0.33
.030	0.76
.060	1.52
.0625	1.59
.090	2.28
.0935	2.38
.100	2.54
.109	2.77
.156	3.96
.200	5.08
.281	7.14
.284	7.21
.380	9.65
.400	10.16
.425	10.80
.557	14.15
.630	16.00
.635	16.13
.750	19.05
.800	20.32
1.388	35.26

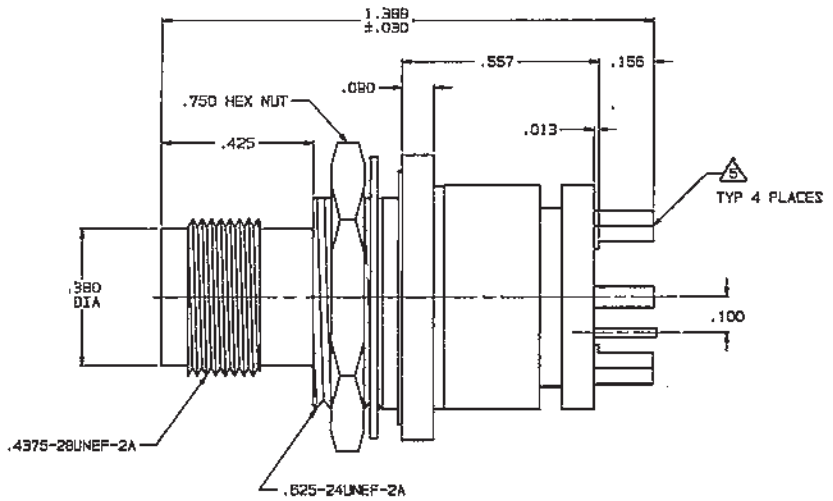

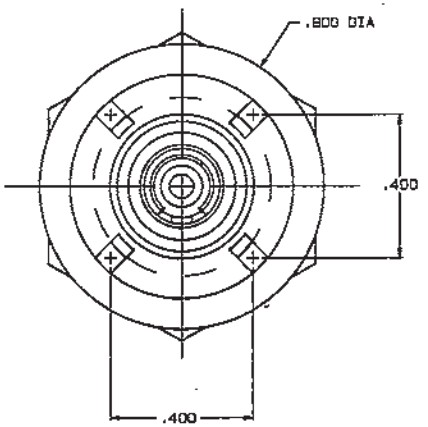



RECOMMENDED
PANEL CUTOUT



RECOMMENDED
MTG HOLE PATT
SCALE: NONE

5 PRE-TINNED, .0015 MAXIMUM THICKNESS WITH SN63 OR EQUIV SOLDER, PER QQ-S-571, TO WITHIN .080 MAXIMUM OF SHOULDER, AFTER PLATING

4. MAXIMUM PANEL THICKNESS .109

3. FEMALE THREADED CONCENTRIC TWINAX / TRIAX CIRCUIT BOARD AND INSULATING BULKHEAD MOUNT RECEPTACLE

2. FINISH: TFS-1A (NICKEL)

1. ALL DIMENSIONS ARE IN INCHES

QTY	DESCRIPTION				PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX ± .0010 ANGLES ±	TROMPETER RF connectivity				CBBJ374	
DWN	OKC	1-12-95	MATERIAL	CODE IDENT	DRAWING NO.	REV
CHK	BM	1-23-95	——	14949	3-0293	A
ENGR						
NEXT ASSY	APPR	[illegible] 1/23/95	SCALE 4/1	DATE 1/23/95	SHEET 1 OF 2	

Please read our datasheet & drawing disclaimer here.