MODEL NUMBER	INTERFACE SPEC	IMPD (OHMS)	Ø"A"	Ø"B"	"C"
CBBJR29	MIL-STD-348, FIG. 301-2	50	.046	.062	.24
UCBBJR29	MIL-STD-348, FIG. 330-1	75	.029		
CBBJR29A	MIL-STD-348, FIG. 301-2	50	.046	.070	.34
UCBBJR29A	MIL-STD-348, FIG. 330-1	75	.029		

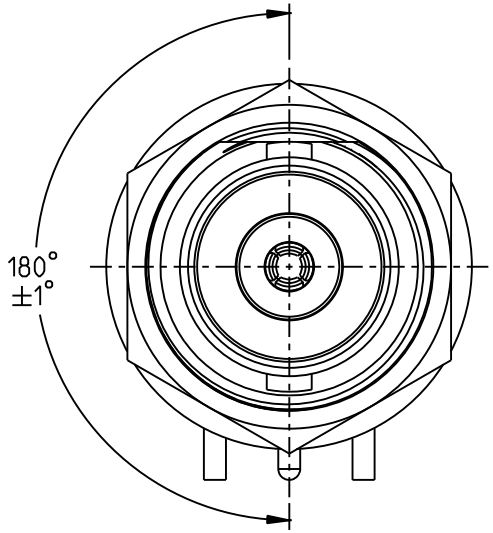

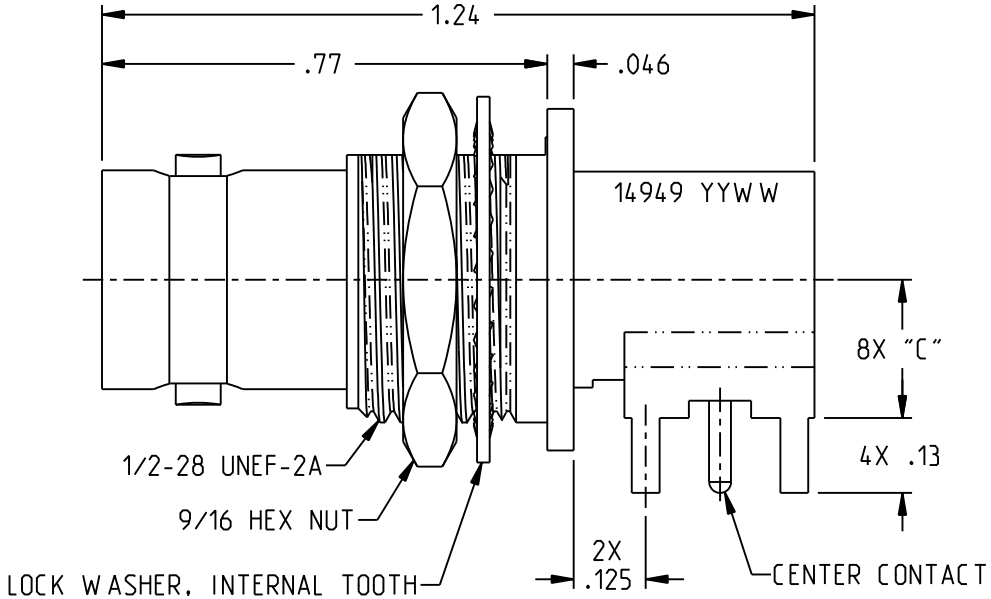

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIALS AND FINISH:
   1.1 BODY: TIN PLATED BRASS
   1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
   1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.4 MOUNTING HARDWARE: TIN PLATED COPPER ALLOY

2. ELECTRICAL:
   2.1 IMPEDANCE: SEE TABLE
   2.2 FREQUENCY (MAX): 500 MHz

3. PANEL THICKNESS (MAX): .125

4. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

CBBJR29 SHOWN

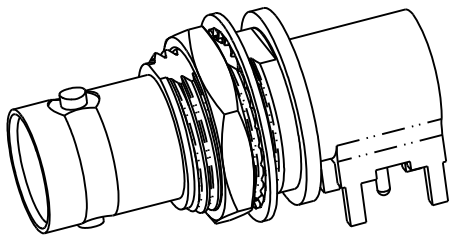



RECOMMENDED PANEL CUTOUT



RECOMMENDED MTG HOLE PATTERN

cinch CONNECTIVITY SOLUTIONS

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

3RD ANGLE PROJECTION

RoHS2 ☑ 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

TROMPETER

Title: BNC BULKHEAD JACK, RIGHT ANGLE PCB MOUNT

Model No. XCBBJR29X

Size	DO NOT SCALE DRAWING	Date:	Sheet
A		8/19/2021	1 OF 1

Please read our datasheet & drawing disclaimer here.