
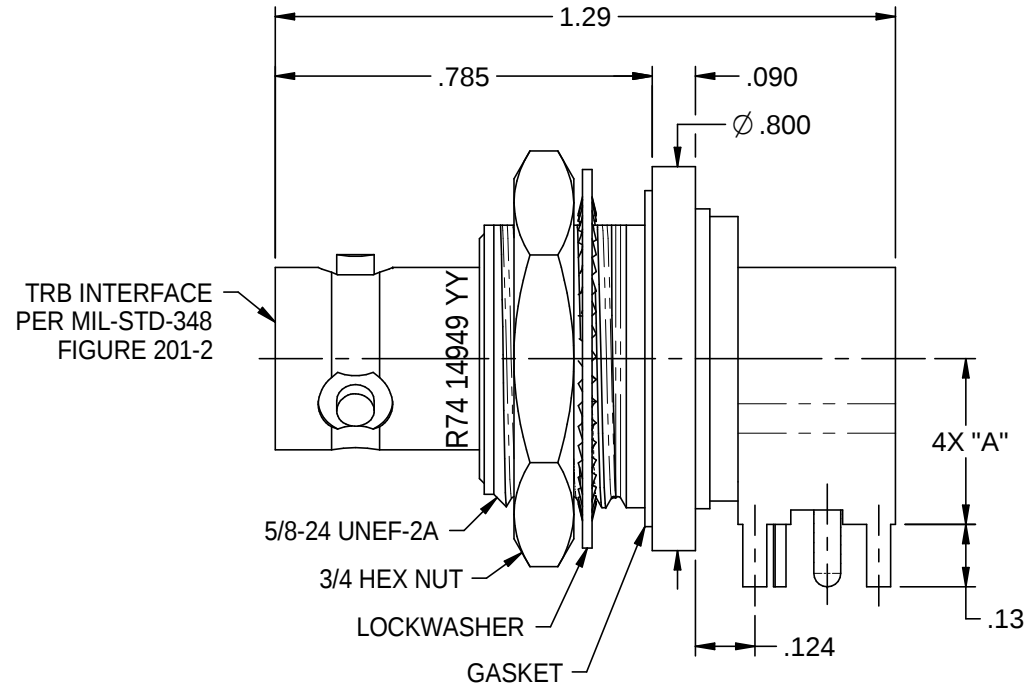


MODEL NO.	"A"	"B"
CBBJR74	.345	.063
CBBJR74A	.445	.070

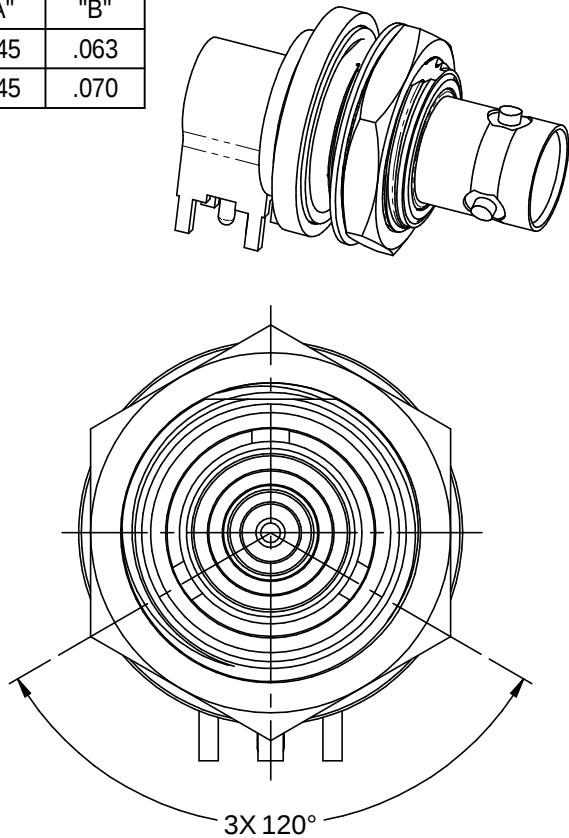

CBBJR74 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIALS AND FINISH:

- 1.1 BODY: TIN PLATED BRASS
- 1.2 OUTER INSULATOR: PTFE (TEFLON)
- 1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
- 1.4 DIELECTRIC: PTFE (TEFLON)
- 1.5 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.6 MOUNTING HARDWARE: TIN PLATED COPPER ALLOY

2. ELECTRICAL:

- 2.1 IMPEDANCE: NON-CONSISTANT
- 2.2 FREQUENCY (MAX): 500 MHz

3. PANEL THICKNESS (MAX): .140

4. PANEL NUT TORQUE (MAX): 40 INCH POUNDS.

RECOMMENDED PANEL CUTOUT		RECOMMENDED MTG HOLE PATTERN	
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.		3RD ANGLE PROJECTION RoHS2 ☒ 2011/65/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.005 ANGLES ±2°	
TROMPETER Title: TRB INSULATED RIGHT ANGLE CIRCUIT BOARD JACK		Model No. CBBJR74X	
Size A	DO NOT SCALE DRAWING	Date: 9/16/2014	Sheet 1 of 1