
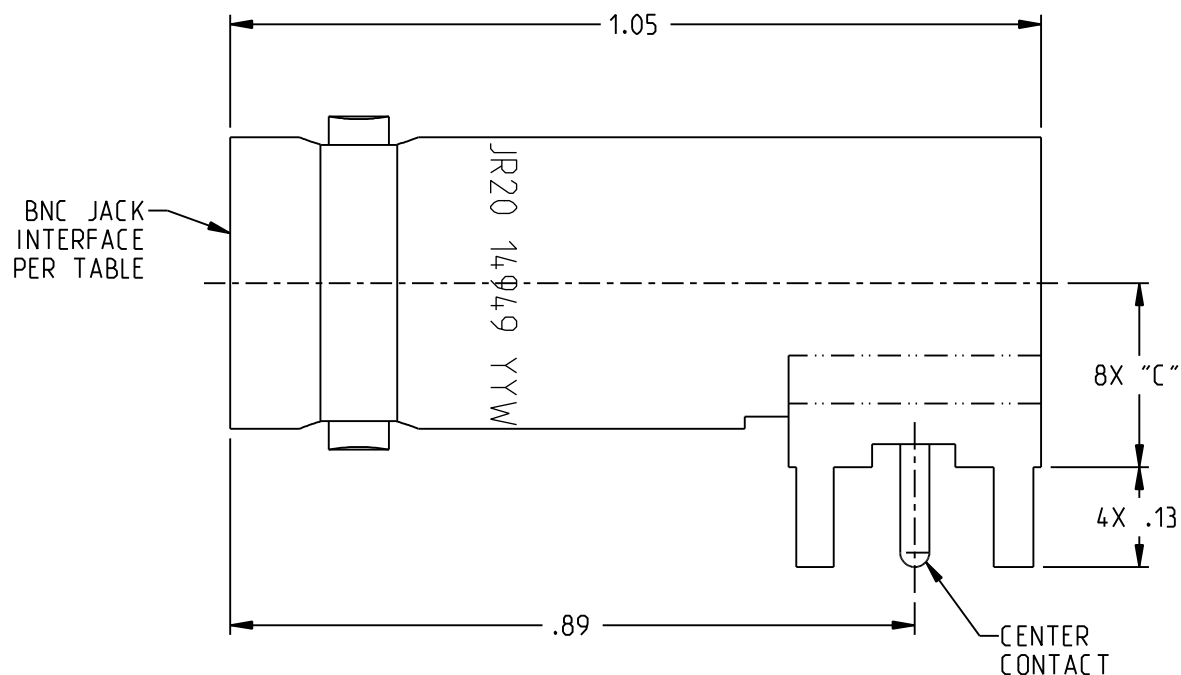


MODEL NUMBER	INTERFACE SPEC	IMPD (OHMS)	Ø"A"	Ø"B"	"C"
CBJR20	MIL-STD-348, FIG. 301-2	50	.046	.0625	.24
UCBJR20	MIL-STD-348, FIG. 330-1	75	.029	±.0010	
CBJR20A	MIL-STD-348, FIG. 301-2	50	.046	.070	.34
UCBJR20A	MIL-STD-348, FIG. 330-1	75	.029	±.001	

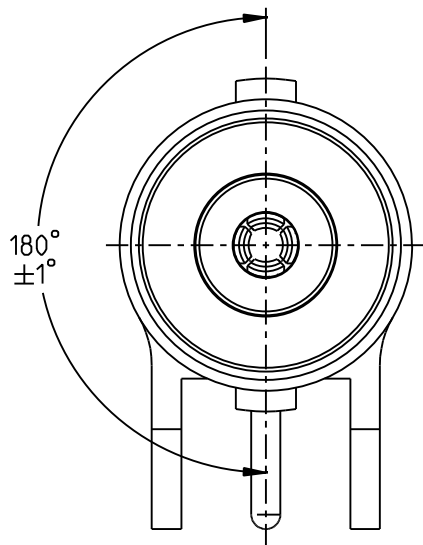

CBJR20 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.


1. MATERIALS AND FINISH:

- 1.1 BODY: TIN PLATED BRASS
- 1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. ELECTRICAL:

- 2.1 IMPEDANCE: SEE TABLE
- 2.2 FREQUENCY (MAX): 500 MHz

RECOMMENDED MTG HOLE PATTERN

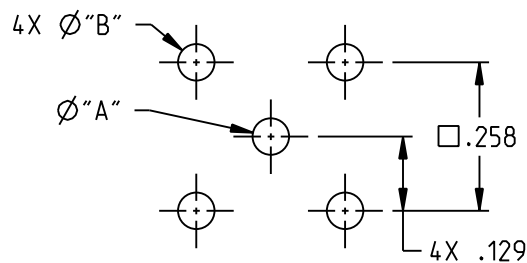

 cinch CONNECTIVITY SOLUTIONS a bell group		TROMPETER			
		Title: BNC RIGHT ANGLE CIRCUIT BOARD JACK			
		Model No. XCBJR20X			
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	RoHS2 ☒ 2011/65/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.010 ANGLES ±2°	Size A	DO NOT SCALE DRAWING	Date: 12/13/2018	Sheet 1 OF 1