MODEL NUMBER	IMPEDANCE (OHMS)	INTERFACE PER
J3	50	TGS-1 (RCA, Ø.070 PIN)
J3W	75	TGS-2 (WECO, Ø.090 PIN)

REV	ECN	DATE
N	14297	10/29/2001
P	14374	02/07/2002
R	60694	09/03/2026

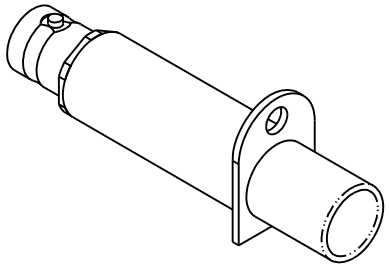

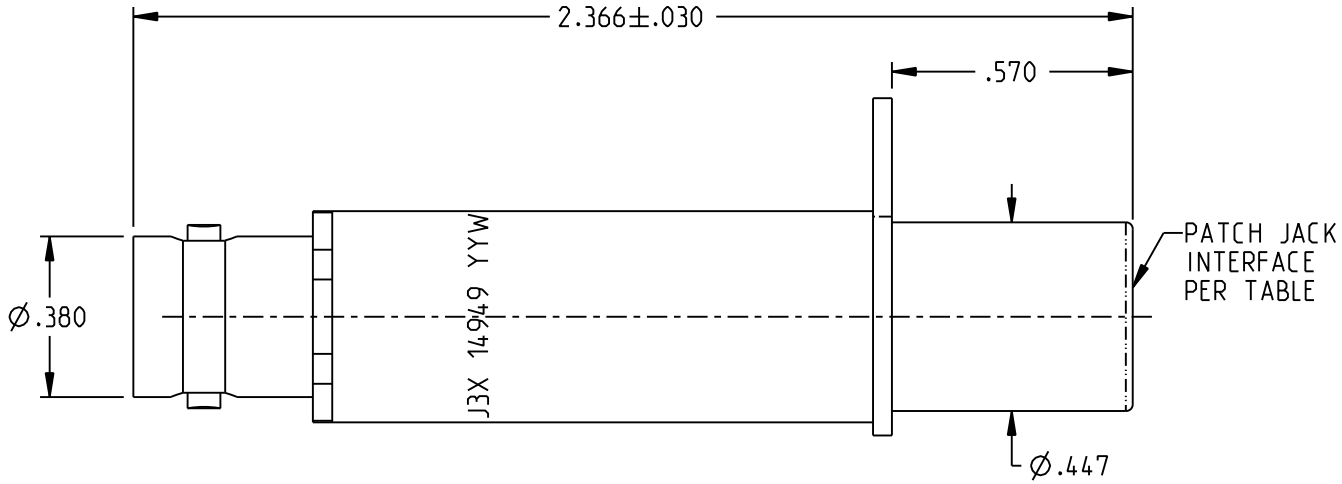

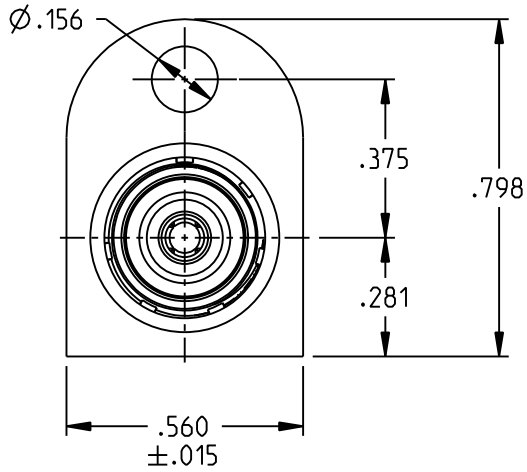

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 PATCH JACK BODY: NICKEL PLATED ALLOY NO. 3 PER ASTM B240
   1.2 BNC BODY: NICKEL PLATED BRASS
   1.3 DIELECTRIC: PTFE (TEFLON)
   1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. ELECTRICAL SPECIFICATIONS:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: SEE TABLE

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

Model No: J3X			TROMPETER
RoHS2 ☑ 2015/863/EU	Cage Code 14949		Title: PATCH JACK TO BNC JACK
UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.010 ANGLES ±2°	3RD ANGLE PROJECTION		Drawing No. C_1-0100 REV. R
	ENGINEER: A. PETERS		
	Date: 09/01/2026	Size A / DO NOT SCALE DRAWING	Workmanship Std: TFS-4 / Sheet 1 OF 1

Please read our datasheet & drawing disclaimer here.