| DASH NUMBER | CABLES ACCOMMODATED | ASSEMBLE PER |
|---|---|---|
| -23 | 275-3930, MICRODOT | TAI-127 |
| -24 | 202-3934, MICRODOT | TAI-125 |
| -24A | 9530A5117, RAYCHEM | TAI-127 |
| -27 | 202-3927, MICRODOT △5<br>73-1317911-1, SYLVANIA | TAI-125 |
| -29 | TWC-124-1A<br>TWC-78-1 | |
| -30 | 8441, BELDEN △4<br>761A, W.E.CO. | |
| -32 | TRC-50-1 | TAI-127 |
| -33 | TRC-75-1 | |
| -43 | 250-4044/250-4045<br>293-3930 MICRODOT | TAI-174 |
| -45 | 10602, RAYCHEM | TAI-125 |
| -47 | M17/176-00002 △5 | |
| -49 | TWAC-78-1F2 △5 | |
| -55 | TWCP-124-3 △4 | |
| -56 | GC875GC1, GRUMMAN | TAI-174 |
| -57 | GC875GB1, GRUMMAN | |
| -58 | GC875TM24H, GRUMMAN | TAI-125 |

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

**REVISIONS**

| REV | DESCRIPTIONS | DATE | APPROVED |
|---|---|---|---|
| P | REVISED PER ECO #16414 | 8/15/07 | JMC |

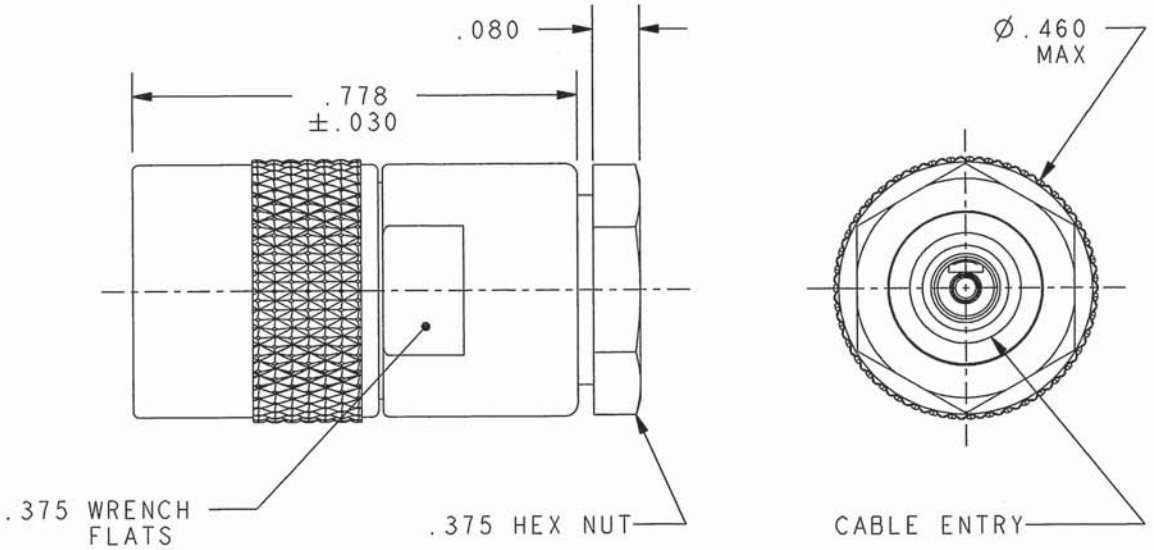


-29 SHOWN

△5 .187 LARGE JACKET SLITS MAY BE REQUIRED FOR EASE OF ASSEMBLY

△4 NOT WRENCH CRIMP

3. CONCENTRIC TWINAX/TRIAX SUBMINIATURE THREADED TTM CABLE PLUG

2. IF SAFETY WIRE TYPE REQUIRED ADD SUFFIX "S" TO MODEL NUMBER (PL3155S)

1. FINISH: NICKEL

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
ANGLE ± 1°

DRN JLM 7-19-07
CHK 8/13/07
QUAL
MANUF
APPROVED 8/14/07
PROJ'E FILE NO. 310-0047

MATERIAL:
FINISH:

NEXT ASSY
DO NOT SCALE DWG

TROMPETER ® ELECTRONICS, INC.

TITLE: PL3155/PL3155S

| SIZE | CAGE CODE | DRAWING NO. | REV. |
|---|---|---|---|
| A | 14949 | 310-0047 | P |

| SCALE | DATE | SHEET |
|---|---|---|
| 3/1 | 8/5/80 | 1C |

Please read our datasheet & drawing disclaimer here.