

DASH NO	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	E DIA	ASSEMBLE PER
-7	TRC-50-2 TRC-75-2	1.135	.096	.438	.438	.500	TAI-189
-8	8227, BELDEN	1.716	.130	.625	.688	.750	TAI-103
-9	TWC-78-2 TWC-124-2	1.135	.096	.438	.438	.500	TAI-102
-A9	BL782, TIMES BL982, TIMES BL1242, TIMES						
-10	RG-22 754E, AT&T	1.716	.130	.625	.688	.750	TAI-103
-11	760A, AT&T						TAI-128
-12	16 PEVL, AT&T V1-AL, GENERAL						TAI-129
-13	TRF-59, TIMES						TAI-165
-13A	8232, BELDEN						TAI-129
-14	8233, BELDEN						TAI-189
-23	250-3884, MICRODOT						TAI-102
-24	202-3934, MICRODOT						TAI-189
-24A	9530A5117, RAYCHEM						TAI-102
-25	T-43M, GENERAL						TAI-189
-25A	5021HS331, RAYCHEM						TAI-189
-26	7028A5518, RAYCHEM						1.135
-27	T19TPSJ2619EN, WOVEN 202-3927, MICRODOT 202-3942, MICRODOT	TAI-189					
-29	TWC-78-1/TWC-124-1A	TAI-189					
-30	761A, AT&T 8441, BELDEN	TAI-189					
-32	TRC-50-1	TAI-102					
-33	TRC-75-1	TAI-102					
-42	21-204, ESSEX 4463, CONSOLIDATED	TAI-103					
-43	250-4044/250-4045 293-3930, MICRODOT	TAI-102					
-45	M27500-22TE2T14 1100-66F, STANDARD	TAI-103					
-46	9860, BELDEN	TAI-102					
-47	M17/176-00002	TAI-189					
-49	TWAC-78-1F2	TAI-102					
-54	89207, BELDEN	TAI-189					
-55	89272, BELDEN	TAI-102					
-56	GC875GC1, GRUMMAN	TAI-189					
-57	GC875GB1, GRUMMAN	TAI-102					
-58	GC875TM24H, GRUMMAN	TAI-189					
-59	GC875LN1, GRUMMAN	TAI-189					
-60	M17/177, THERMATICS 380-10045, BOEING	TAI-189					
-64	7528A5314, RAYCHEM						

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS INC.

REVISIONS		310-0025	SH 1
REV	DESCRIPTION	DATE	APPROVED
U	REVISED PER ECO 14778	11-5-02	RM

CABLE ENTRY			
DASH NO	DIA	DASH NO	DIA
-7	.274	-29	.191
-8	.345	-30	.235
-9	.285	-32	.191
-A9		-33	.217
-10	.455	-42	.300
-11	.347	-43	.200
-12	.495	-45	.183
-13	.362	-46	.475
-13A	.352	-47	.164
-14	.490	-49	.132
-23	.183	-54	.323
-24	.191	-55	.250
-24A	.200	-56	.191
-25	.285	-57	
-25A		-58	.198
-26	.191	-59	
-27	.145	-60	.217
		-64	.183

FIG 1  
-9 SHOWN


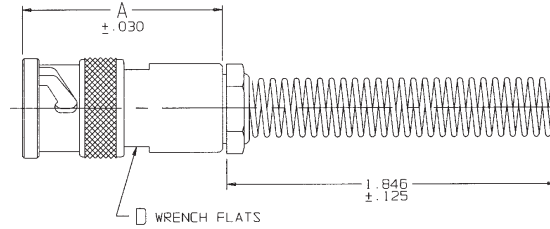


FIG 2  
-9 SHOWN

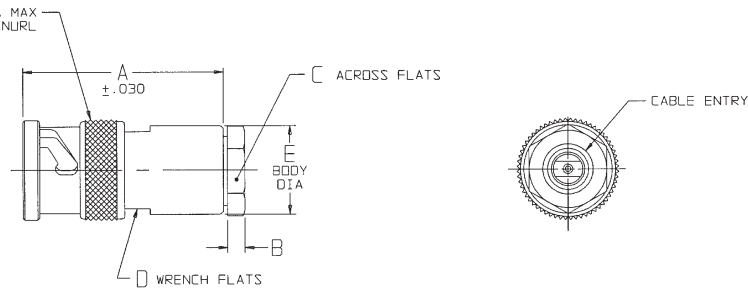

RED INDICATES ORIGINAL

6. EXAMPLE OF A COMPLETE MODEL NO.

PL74 -47

BASIC MODEL NO. | DASH NO.

IF BEND RELIEF SPRING REQD (SEE FIG 1)  
ADD SUFFIX "BR" TO MODEL NO  
(NOT AVAILABLE WITH CABLE GROUPS -8,-10,-11,  
-12,-13,-13A,-14,-46 & -54)

CLAMP NUT OMITTED  
2-LUG BAYONET CONCENTRIC TWINAX/TRIAX TRB CABLE PLUG

FINISH: TFS-1A (NICKEL)

ALL DIM ARE IN INCHES

TYPE	DASH NO/CABLE GROUP																
TWINAX	-8	-9	-A9	-10	-11	-12	-24	-25	-27	-29	-30	-45	-46	-47	-49	-54	-55
TRIAx	-7	-13	-13A	-14	-23	-24A	-25A	-26	-32	-33	-42	-43	-56	-57	-59	-60	-64
QUADRAx	-58																

INTERPRET DIMING PER MIL-STD-100 DIMENSIONS ARE IN INCHES UNLESS FINISH INDICATED UNLESS OTHERWISE SPECIFIED	UNLESS SPECIFIED .XX .XXX ± .005 .XXXX UNLESS OTHERWISE SPECIFIED ANGLE(S)		TITLE:
DATE: 11-4-02	MATERIAL:		PL74/PL74BR
11-4-02	11-4-02	SIZE:	CAGE CODE: 14949
11/5/02	11/5/02	DRAWING NO:	310-0025
305-0515	310-0025U	SCALE:	NONE
NEXT ASSY	310-0025U	DATE:	3/27/78
		SHEET:	1C