TABLE 1				
MODEL NUMBER	CABLES ACCOMMODATED	"A"	ASSEMBLE PER	SH
PL75C-201	M17/176-00002	1.70	TAI-166	1
PL75C-202	TWC-78-1			
PL75C-203	TWC-124-1A			
PL75C-204	10602, RAYCHEM			
PL75C-205	TWAC-78-1F2			
PL75C-206	7826D0130, RAYCHEM			
PL75C-207	83310, BELDEN			
PL75C-208	202-3927, MICRODOT			
PL75C-209	202-3942, MICRODOT			
PL75C-210	8451, BELDEN			
PL75C-211	202-3934, MICRODOT	1.44	TAI-138	1
PL75C-212	2524E0114, RAYCHEM			
PL75C-213	TWC-78-2			
PL75C-213-1U	TWC-78-2			2
PL75C-214	TWC-124-2			1
PL75C-215	BL982, TIMES			
PL75C-216	BL1242, TIMES			
PL75C-217	GC875TM24H, GRUMMAN	1.70	TAI-166	1
PL75C-218	EDP221888, RAYCHEM			
PL75C-219	2526D1114, RAYCHEM			
PL75C-220	GC875RR1, GRUMMAN			
PL75C-221	10614, RAYCHEM			
PL75C-222	10613, RAYCHEM			
PL75C-223	HMS2-1149, HUGHES			
PL75C-224	TWCP-124-3	1.44	TAI-138	1
PL75C-225	PS665PL, PRIME STOCK			
PL75C-301	GC875GC1, GRUMMAN	1.70	TAI-168	1
PL75C-302	GC875GB1, GRUMMAN			
PL75C-303	7528A5314, RAYCHEM			
PL75C-305	M17/177-00001, THERMATICS			
PL75C-306	TRC-50-2 M17/134-00002	1.70	TAI-218	1
PL75C-307	TRC-75-1	1.70	TAI-168	1
PL75C-308	TRC-75-2	1.70	TAI-218	1
PL75C-309	TRC-50-1	1.70	TAI-168	1

TABLE 2			
POLARIZATION CHART			
KEYING LETTER	"D°"	"E°"	"F°"
NONE	120	120	120
T	100	150	110
U	120	130	110
V	115	130	115
W	125	110	125
X	130	100	130
Y	110	140	110
Z	100	160	100
S	135	135	90

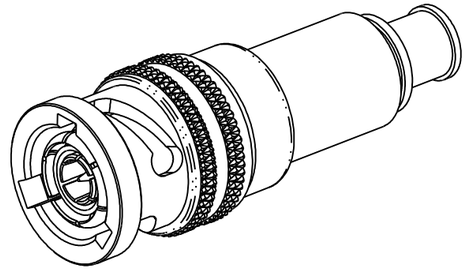

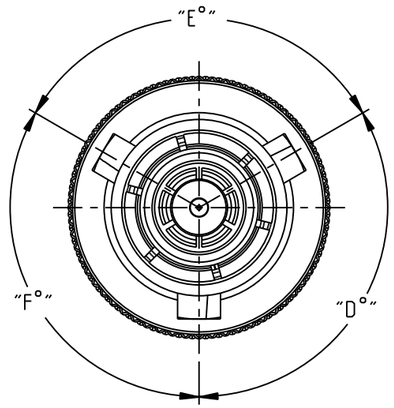

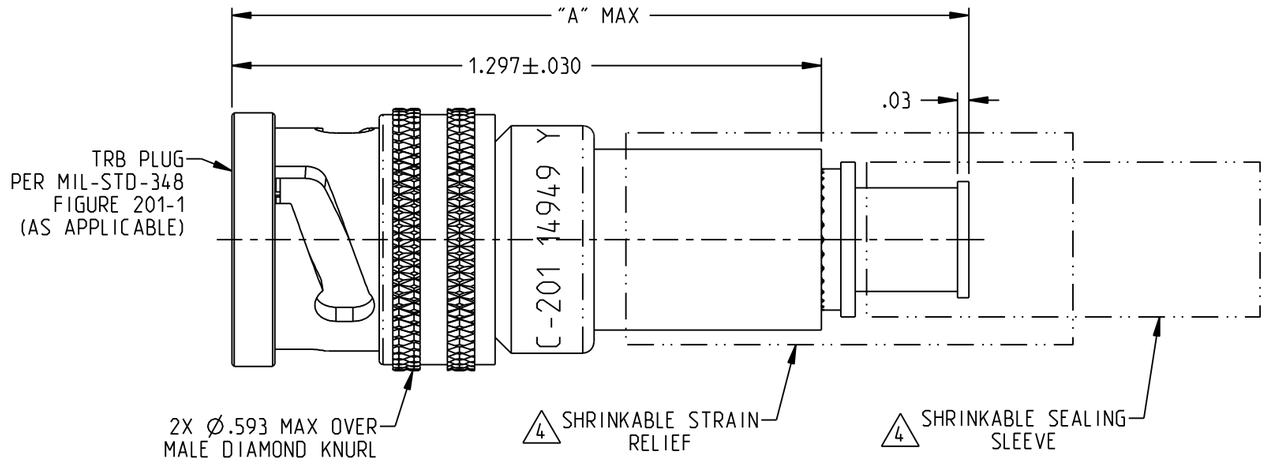

PL75C-201 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:
   1.1 BODY, CRIMP RING & CRIMP BUSHING: NICKEL PLATED BRASS
   1.2 FINGER SPRING: NICKEL PLATED BERYLLIUM COPPER
   1.3 INSULATORS & DIELECTRICS: PTFE (TEFLON)
   1.4 INTERMEDIATE CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.5 CENTER CONTACT: GOLD PLATED BRASS
   1.6 GASKET: SILICONE RUBBER
   1.7 STRAIN RELIEF & SEALING SLEEVE: POLYOLEFIN

2. ELECTRICAL:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: NON-CONSTANT

3. EXAMPLE OF COMPLETE MODEL NUMBER:
   PL75C A -BBB
   - -BBB: ASSEMBLY DASH NO.
   - A: KEYING LETTER PER TABLE 2 (IF APPLICABLE)
   - PL75C: BASE MODEL NO.

4 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:
4.1 CABLE GROUPS -201 THRU -210, -217 THRU -223, -301, -302, - 303, -305, -307 & -309
1 SHRINKABLE STRAIN RELIEF
1 SHRINKABLE SEALING SLEEVE
4.2 CABLE GROUPS -211 THRU -216, -224, -225, -306 & -308
1 SHRINKABLE STRAIN RELIEF

cinch CONNECTIVITY SOLUTIONS a bel group

This PROPRIETARY Document is property of Cinch Connectivity Solutions.It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

3RD ANGLE PROJECTION

RoHS2 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±1°

TROMPETER

Title: TRB CABLE PLUG, TOOL CRIMP

Model No.: PL75CA-BBB

Size: B | DO NOT SCALE DRAWING | Date: 8/22/2018 | Sheet: 1 OF 2

Please read our datasheet & drawing disclaimer here.

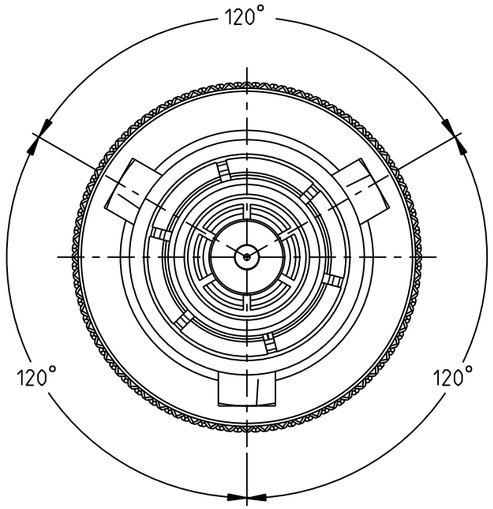

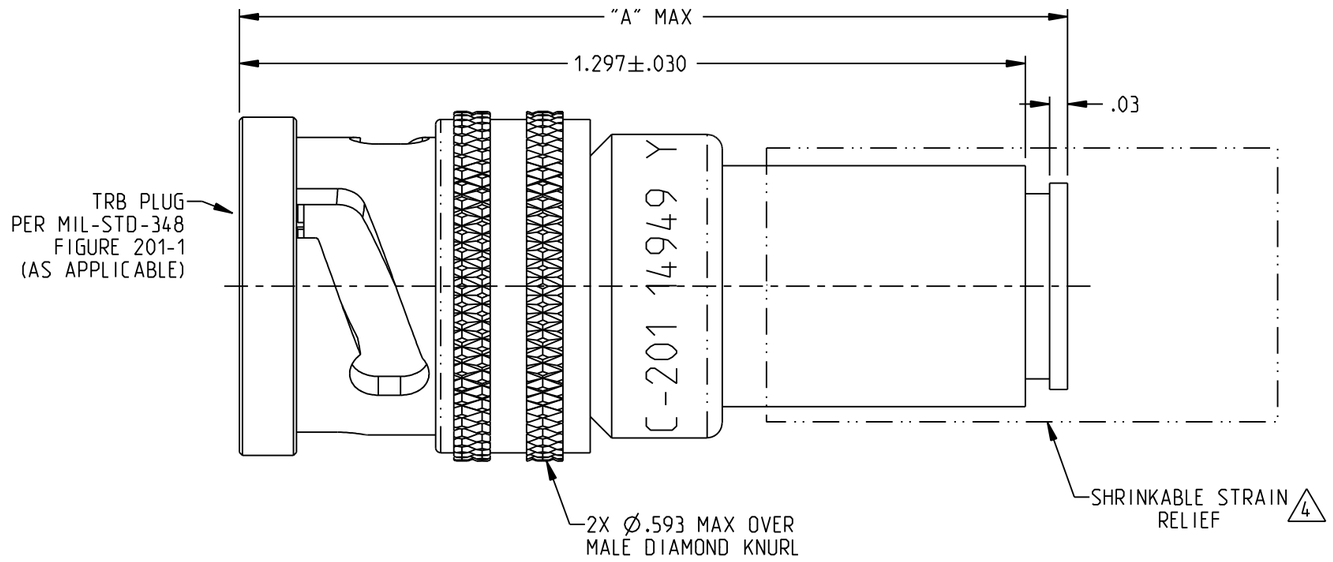

PL75C-213-1U SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED (THIS PAGE).

1. MATERIAL & FINISH:
 1.1 BODY, CRIMP RING & CRIMP BUSHING: NICKEL PLATED BRASS
 1.2 FINGER SPRING: NICKEL PLATED BERYLLIUM COPPER
 1.3 INSULATORS & DIELECTRICS: PTFE (TEFLON)
 1.4 INTERMEDIATE CONTACT: GOLD PLATED BERYLLIUM COPPER
 1.5 CENTER CONTACT: GOLD PLATED BRASS
 1.6 GASKET: SILICONE RUBBER
 1.7 STRAIN RELIEF & SEALING SLEEVE: POLYOLEFIN

cinch CONNECTIVITY SOLUTIONS
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

3RD ANGLE PROJECTION

RoHS2 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS INCH
.XX ±.02
.XXX ±.010
ANGLES ±1°

TROMPETER

Title: TRB CABLE PLUG, TOOL CRIMP

Model No. PL75CA-BBB

Size B | DO NOT SCALE DRAWING | Date: 8/22/2018 | Sheet 2 OF 2