RoHS COMPLIANT

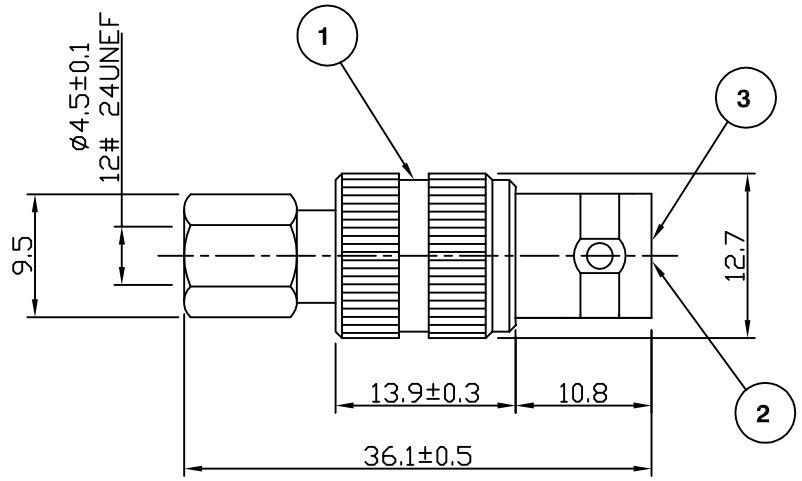

Electrical Characteristics

Nominal Impedance:	50 ohms
Frequency Range:	DC to 1 GHz
VSWR:	1.3:1 maximum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Contact	Brass, Gold plated
3	Dielectric	Delrin

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Layout update	JT	2	05 Aug 10
First Issue	AT	1	26 Sep 94

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russell Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	DRAWN BY:	A Tatner	TITLE: Twist-On BNC Jack for RG58
DIMENSIONS: mm	CHECKED BY:	A Tatner	PART NUMBER: **TOBNC30-58**
TOLERANCES: ± 0.2mm unless otherwise stated	APPROVED BY:	I Sparkes	PAGE: 1 of 1
	DATE:	26 Sep 94	

COPYRIGHT © 2006 VITELEC ELECTRONICS LIMITED THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Please read our datasheet & drawing disclaimer here.