

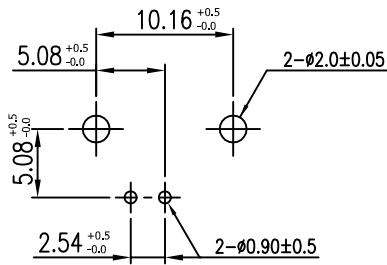
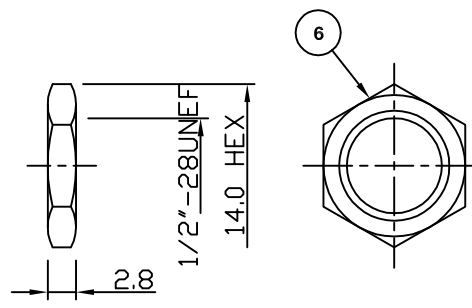

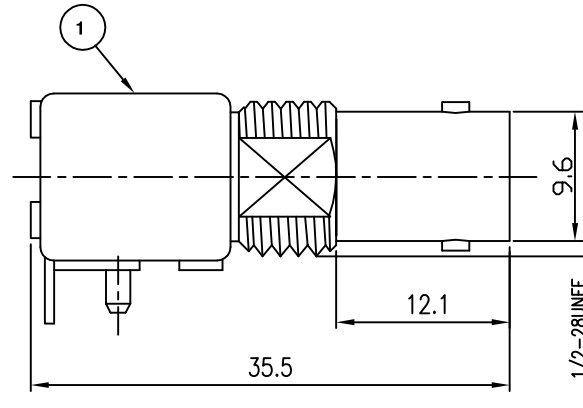


RoHS COMPLIANT

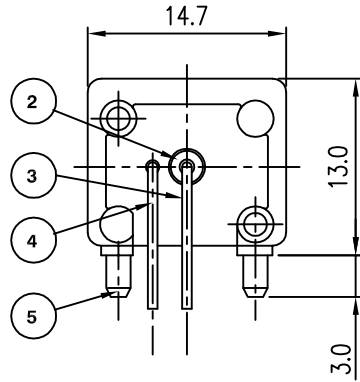

RECOMMENDED PCB LAYOUT

PANEL CUT-OUT

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 1 GHz
VSWR:	1.3:1 maximum
Insertion Loss:	0.2 dB at 1 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	3.0 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C
--------------------	------------------

PART	DESCRIPTION
1	Body
2	Dielectric
3	Contact
4	Ground Terminal
5	Mounting Post
6	Nut
7	Washer

Tin plating thickness added	KA	2	05 Mar 08
First Issue	KA	1	06 Nov 07
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions:
7-13 Russell Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY:

K Ager

CHECKED BY:

M Spooner

APPROVED BY:

M.Spooner

DATE:

06 Nov 07

TITLE:

BNC Right Angle PCB Mount
Jack Low Profile
With Nut and Washer

PART NUMBER:

VBM211/3-75

PAGE: 1 of 1