UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM

ISSUE	CHANGE DESCRIPTION	DATE	APPROVED
1	FIRST ISSUE	02-Sep-99	CBB
2	CAD ISSUE	06-Jun-02	PDC
3	PLATING OF MOUNT POST	29-Nov-07	MS
4	COMPLETE UPDATE	17-Mar-08	KA
5	DIMENSION UPDATE	13-May-15	JC
6	D17472	30-Apr-21	MS
7	D17509	16-Dec-21	MS
8	D17506	09-Oct-24	SM

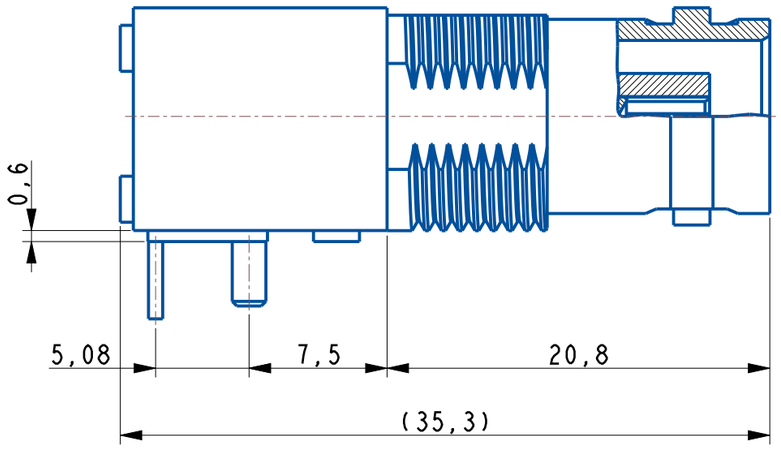

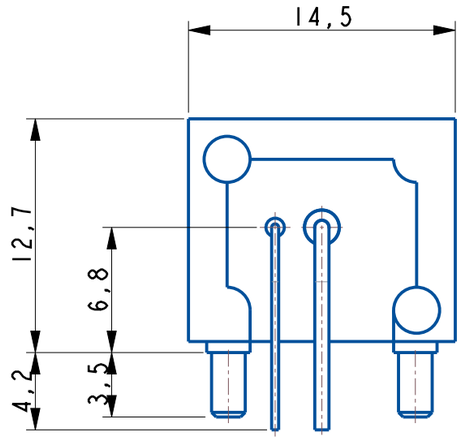

ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE:	75 OHMS
FREQUENCY RANGE:	DC TO 4 GHz
VSWR:	1.3:1 MAX.
OPERATING VOLTAGE (RMS):	500V MAX. @ SEA LEVEL
DWV (RMS):	1500V MAX. @ SEA LEVEL
CENTRE CONTACT RESISTANCE:	1.5 mΩ MAX.
OUTER CONTACT RESISTANCE:	1.0 mΩ MAX.
INSULTION RESISTANCE:	5000 M MIN.

MECHANICAL CHARACTERISTICS:

MATING CYCLES:	500 CYCLES MIN.
INTERFACE DIMENSIONS:	CONFORM TO MIL-C-39012

ENVIRONMENTAL CHARACTERISTICS:

TEMPERATURE RANGE:	-65°C TO +160°C

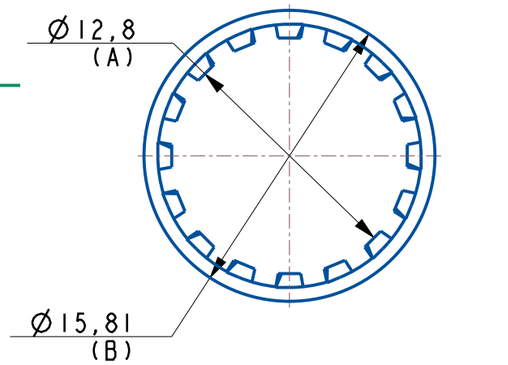

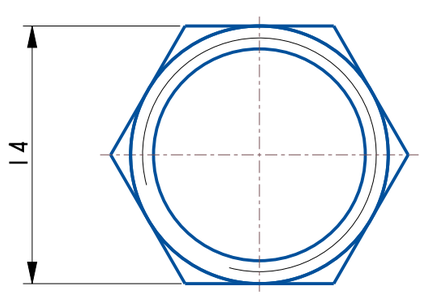



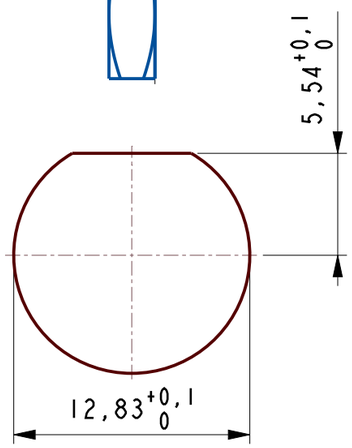

PANEL CUT-OUT

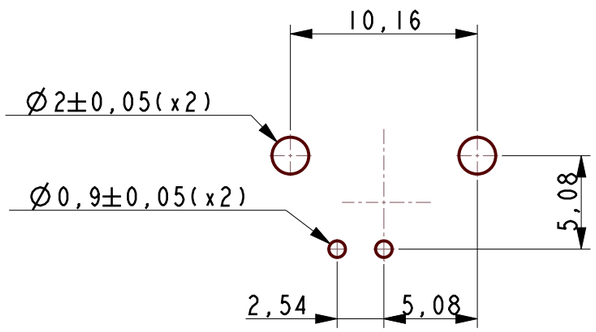

PCB HOLES

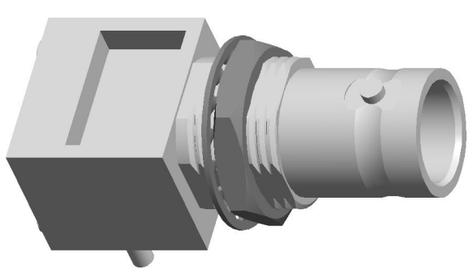

SCALE 2:1

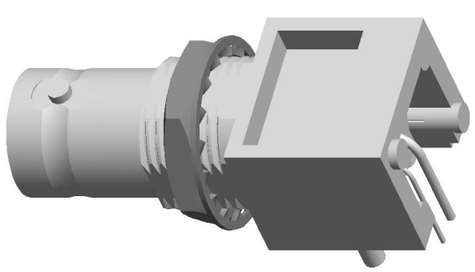

SCALE 2:1

DRAWN TO BS 8888
TOLERANCES (unless specified): ISO 2768mK

DRAWN BY: M.BARRACLOUGH

CAGE CODE: U1718

THIS DRAWING IS COPYRIGHT AND IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF CINCH LTD.
ATTENTION IS DRAWN TO THE FACT THE ARTICLE DISCLOSED MAY BE COVERED BY BRITISH OR FOREIGN PATENTS, GRANTED OR PENDING OR REGISTERED DESIGN.

CINCH CONNECTORS LTD
SHIREOAKS ROAD, WORKSOP
S80 3HA (01909) 474131

DRAWING TITLE: BNC RIGHT ANGLE JACK LOW PROFILE PCB MOUNT

DRAWING NUMBER: VBM211-75

SCALE: 3:1

SHEET: 1 OF 1

A3

Please read our datasheet & drawing disclaimer here.