RoHS COMPLIANT

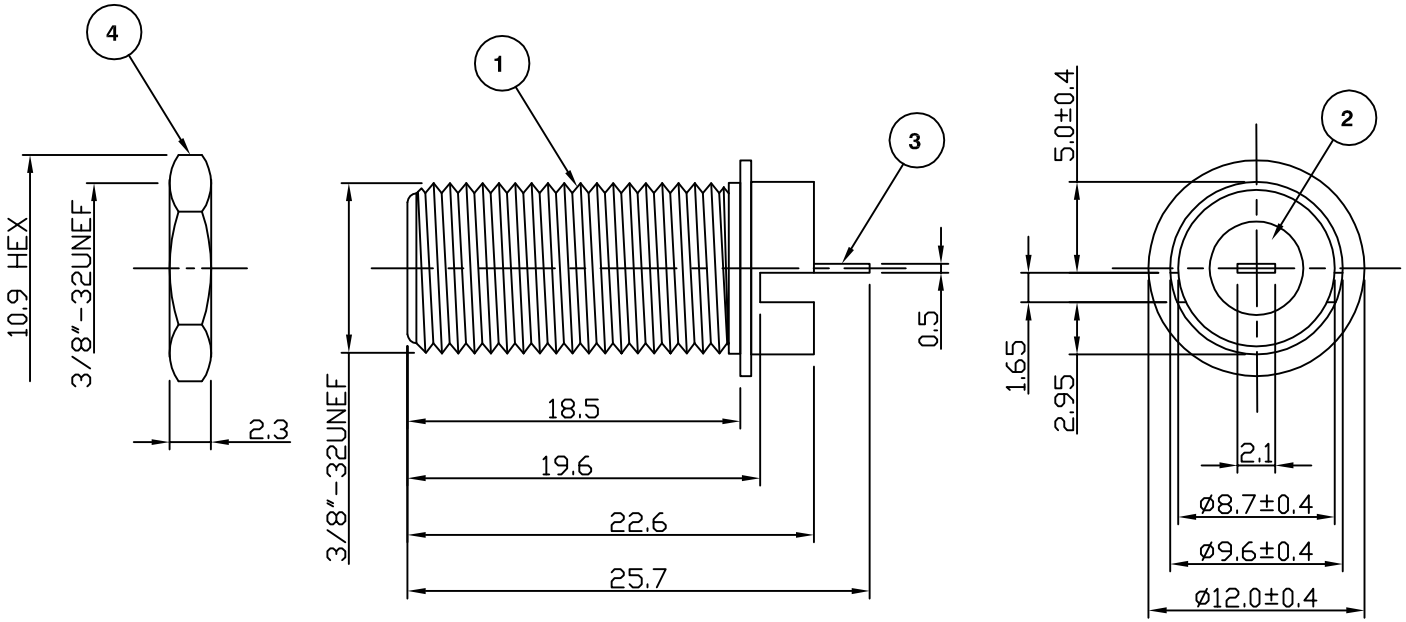

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 2 GHz
Operating Voltage (rms):	250 V maximum at sea level

Mechanical Characteristics

Mating Cycles:	200 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, tin plated
2	Dielectric	Polypropylene
3	Contact	Brass, tin plated
4	Nut	Steel, nickel plated

Up Issue	LB	4	20 Oct 11
CAD Issue	SN	3	26 Sep 02
Up Issue	DW	2	02 Jul 99
First Issue	AT	1	26 Oct 98
DESCRIPTION OF REVISION	APPVD	ISS	DATE

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	DRAWN BY:	S Nash	TITLE: F Edge Mount PCB Jack
DIMENSIONS: mm	CHECKED BY:	P Couzens	PART NUMBER: **VF312**
TOLERANCES: ± 0.2mm unless otherwise stated	APPROVED BY:	P Couzens	PAGE: 1 of 1
	DATE:	26 Sep 02	

COPYRIGHT © 2002 VITELEC ELECTRONICS LIMITED

THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Please read our datasheet & drawing disclaimer here.