


RoHS COMPLIANT

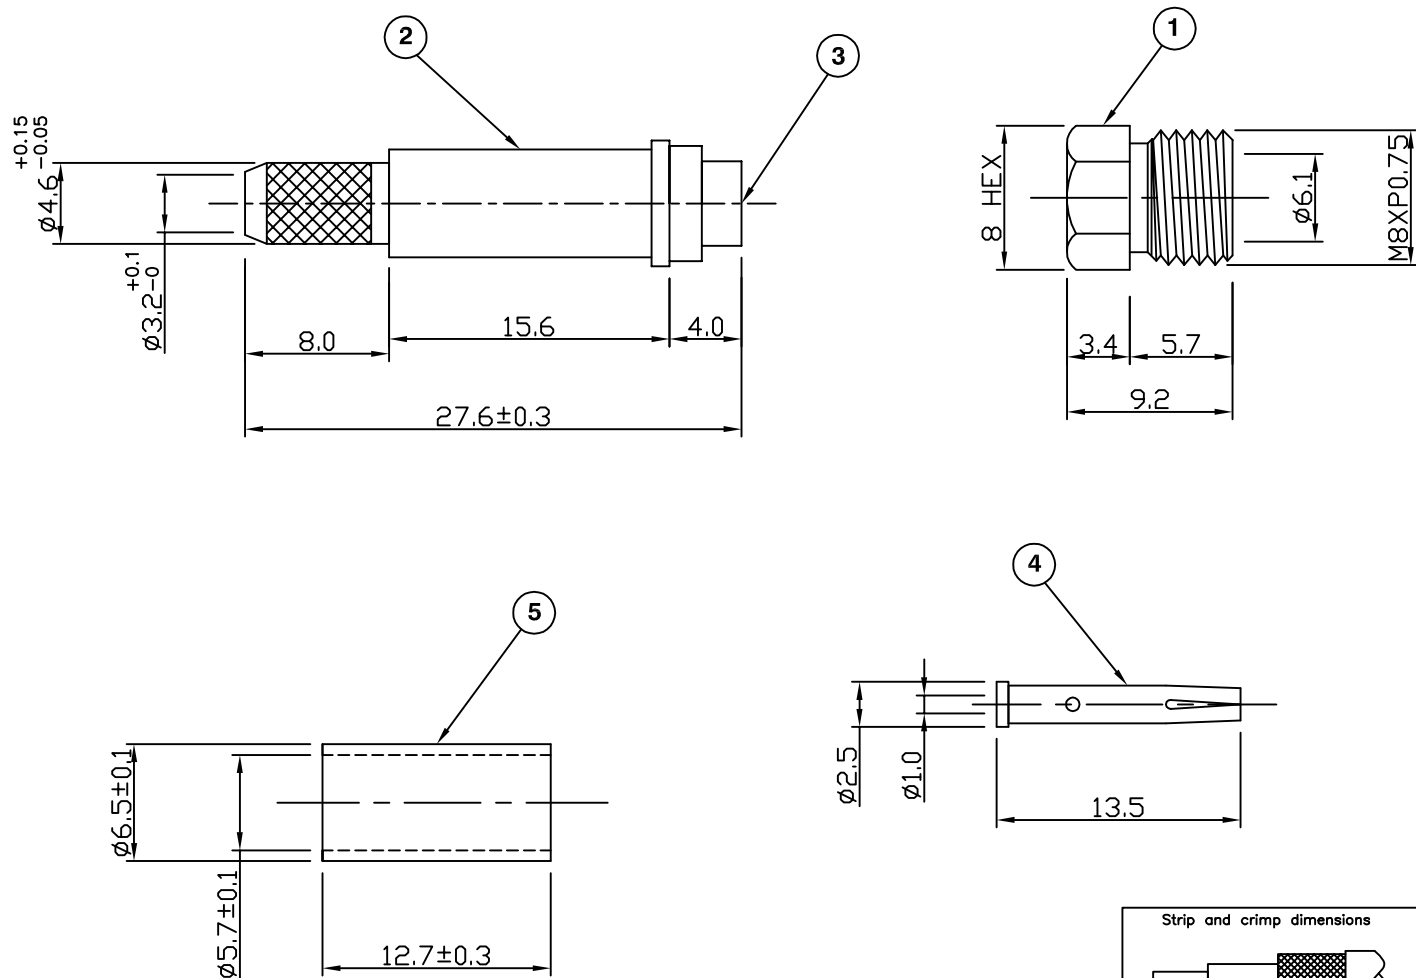

For stripping and assembly instructions see Drawing Number: VAIR3101

Electrical Characteristics

Nominal Impedance:	50 ohms
Frequency Range:	DC to 2 GHz
VSWR:	1.3:1 maximum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
----------------	--------------------

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C
--------------------	------------------

	PART	DESCRIPTION
1	Nut	Brass, nickel plated
2	Body	Brass, nickel plated
3	Dielectric	POM
4	Contact	Brass, gold plated
5	Ferrule	Brass, nickel plated

First Issue	AT	1	09 Sep 05
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,
Essex, CM1 3AA, UK
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 ± 0.2 mm unless
otherwise stated

DRAWN BY:

A Tusi

CHECKED BY:

M Terry

APPROVED BY:

J Williams

DATE:

09 Sep 05

TITLE:

FME Crimp Jack for
RG223

PART NUMBER:

VR30-2050

PAGE: 1 of 1