

NOTES:

1.0 SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 0.5 to 18.0 GHz
- 1.2 INSERTION LOSS: $(1.0+0.25f[\text{GHz}])\text{dB}$ MAX.
- 1.3 AMPLITUDE BALANCE: 1.0dB MAX.
- 1.4 PHASE BALANCE: 15° MAX.
- 1.5 VSWR: 1.50:1 MAX.
- 1.6 ISOLATION: 15dB MIN.
- 1.7 INPUT POWER: 30 WATTS MAX.

2.0 FINISHING:

GREY PER MIL-E-15090 TYPE II, CLASS 2
 OVER MIL-C-5541 CLASS 3A
 MEETS MIL-F-14072
 MEETS MIL-E-5400

2.1 MARKING: MARK UNIT AS SHOWN
 (REF.: SLK-09400-82-01)

3.0 DIMENSIONS IN BRACKETS ARE
 IN MILLIMETERS.

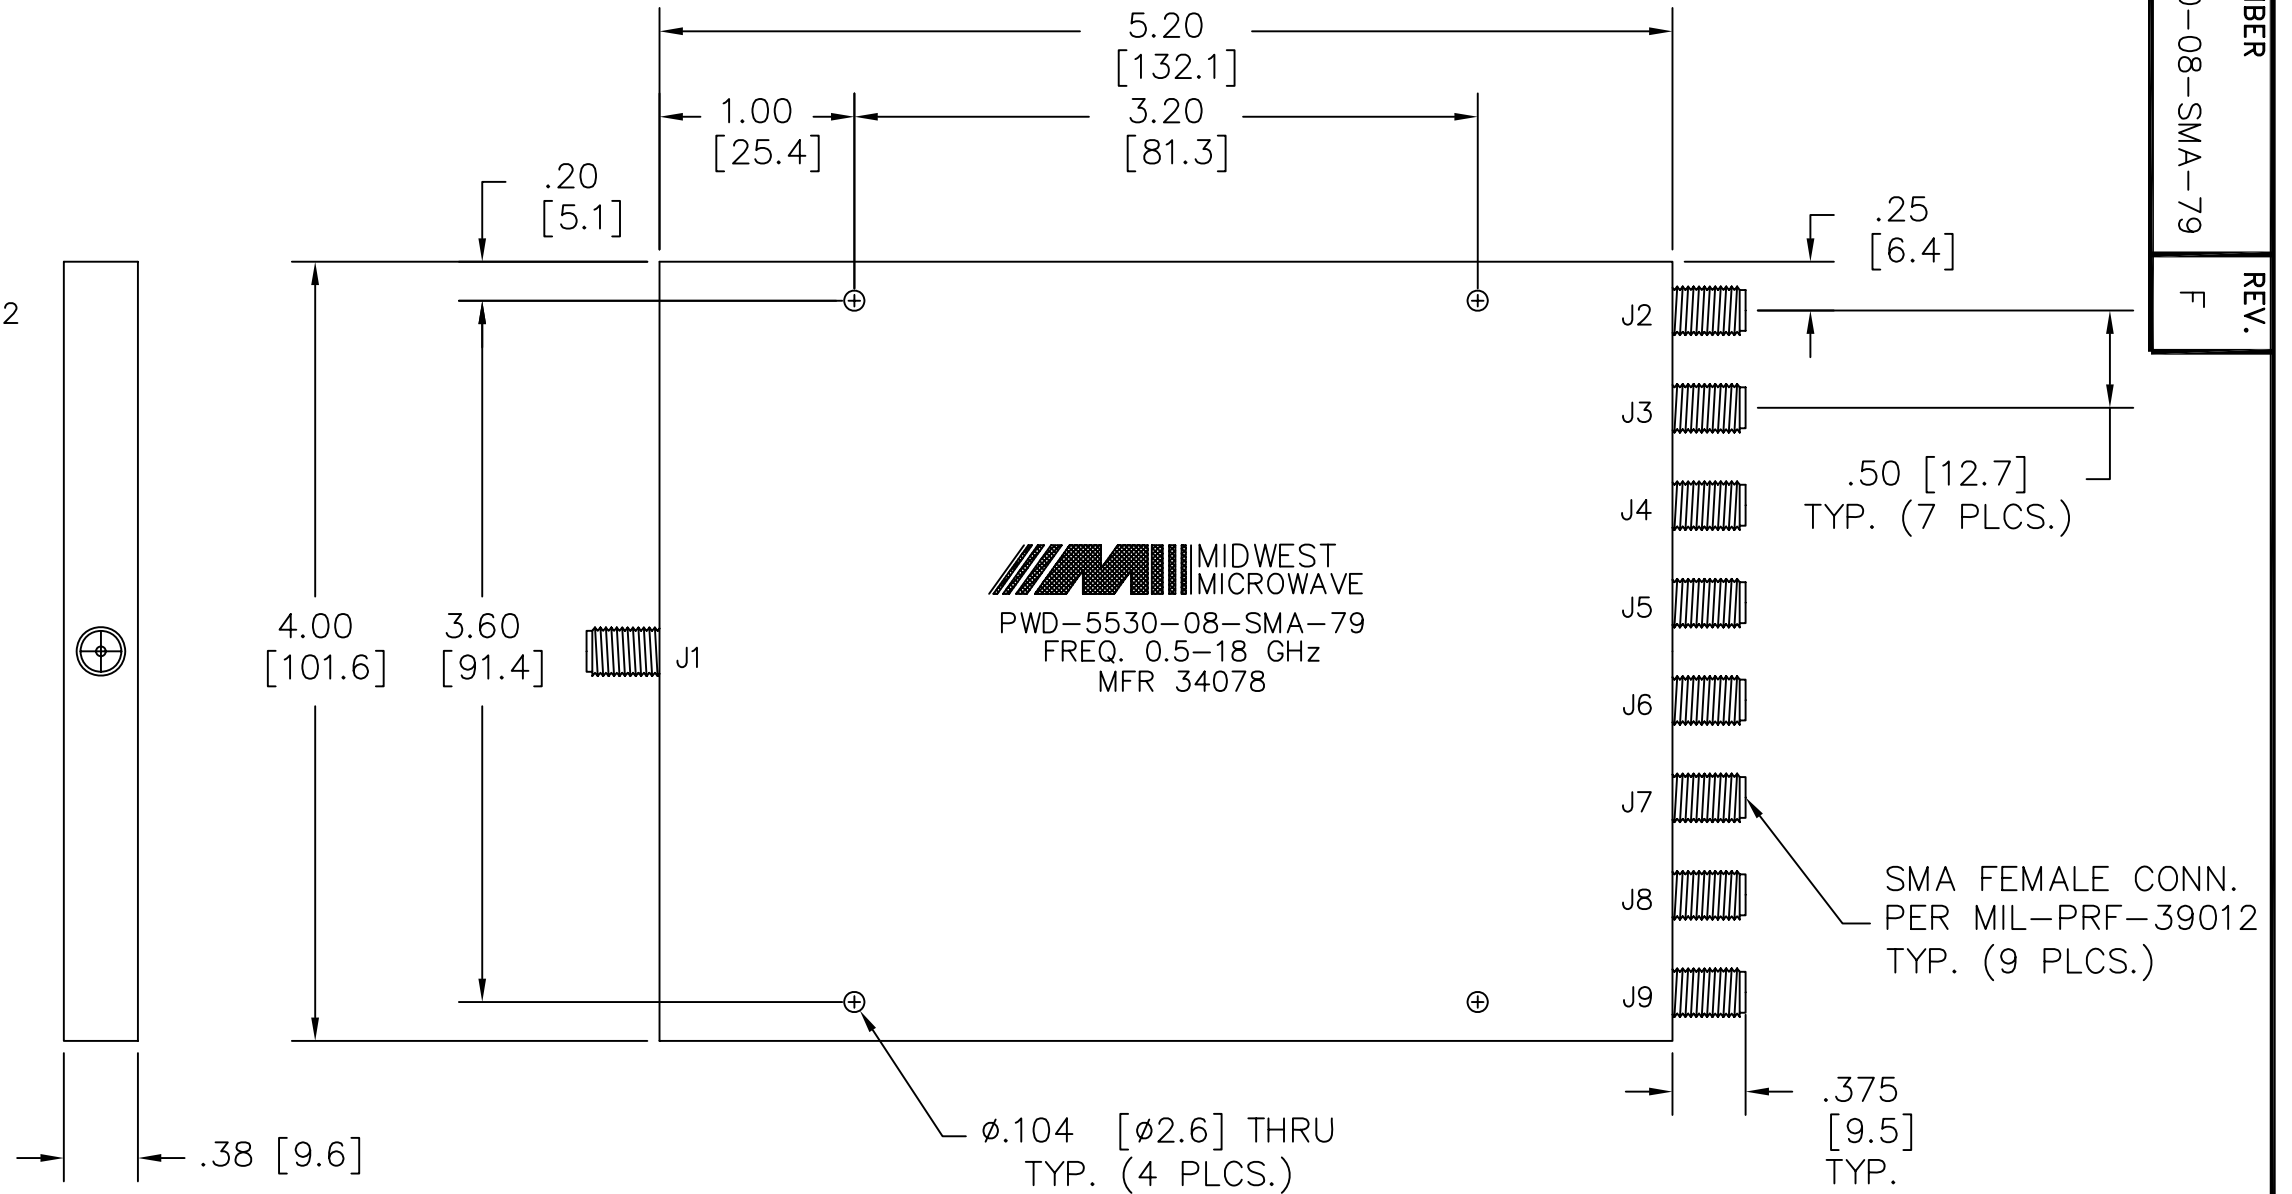

MODEL NUMBER
 PWD-5530-08-SMA-79
 REV. F

DATE	1/17/95	5/1/97	6/8/99	4/24/00	8/1/02	4/22/04	10/24/07
DESCRIPTION	RELEASED	ECN 15972	ECN 17109	ECN 17500	ECN 18670	ECN 19794	ECN 21536
REV.	-	A	B	C	D	E	F

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE POWER DIVIDER
DRAWN/DATE A. BEATTY 1/17/95		ENG./DATE P. GOODMAN 1/17/95	DRAWING NUMBER PWD-5530-08-SMA-79
CHECKED/DATE		APPROVED/DATE	SCALE: FULL SHEET 1 of 1