




MODEL NUMBER	TERMINATION USED	DESCRIPTION
TRM-2443-MS-SMA-02	TRM-2443-M0-SMA-02	26.5 GHz
TRM-2444-MS-SMA-02	TRM-2444-M0-SMA-02	18.0 GHz
TRM-2446-MS-SMA-02	TRM-2446-M0-SMA-02	8.0 GHz

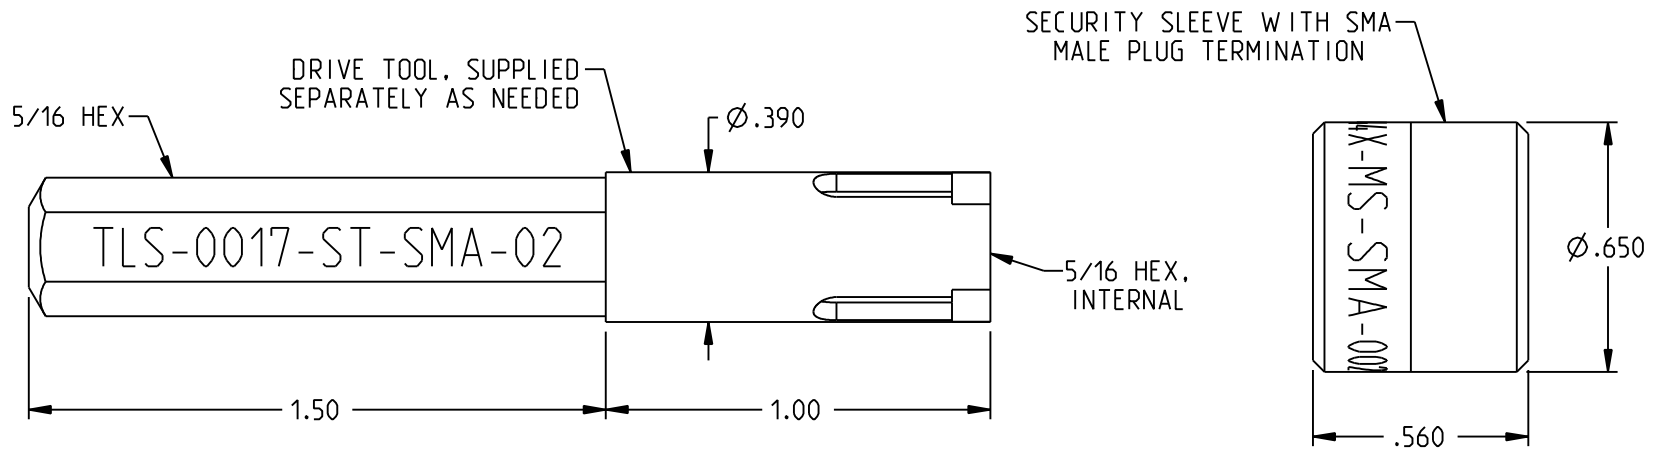

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:
 - 1.1 SECURITY SLEEVE: PASSIVATED STAINLESS STEEL
 - 1.2 TERMINATION: SEE TERMINATION DRAWING
 - 1.3 DRIVE TOOL (IF SUPPLIED): PASSIVATED STAINLESS STEEL
2. TERMINATION: SEE CATALOG/WEBSITE FOR SPECIFICATIONS.

 cinch CONNECTIVITY SOLUTIONS <small>© 2016 CINCH</small>	3RD ANGLE PROJECTION 	MIDWEST MICROWAVE	
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU <small>UNLESS OTHERWISE SPECIFIED UNITS: INCH</small> .XX ±.02 .XXX ±.010 ANGLES ±2°	Title: SECURITY TERMINATION, SMA	Model No.: TRM-244X-MS-SMA-02
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	Size: A	DO NOT SCALE DRAWING	Date: 9/29/2016
			Sheet: 1 OF 1