

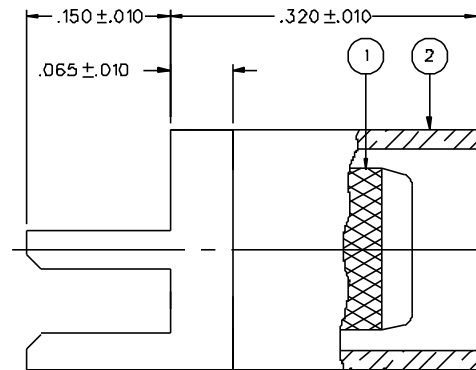


PART NUMBER	ITEM ① BODY	ITEM ② CRIMP SLEEVE
142-0007-801	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	COPPER GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN
142-0007-806	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN


DRAWING NO. C - 142-0007-801/810	
0	REVISIONS
ENGINEERING RELEASE	
1	8-26-98 R H S T R ECN 45826

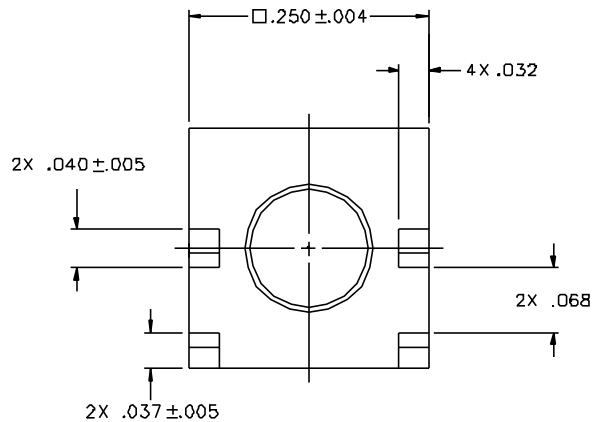

DIMENSIONS ARE SYMMETRICAL ABOUT THE CENTERLINE

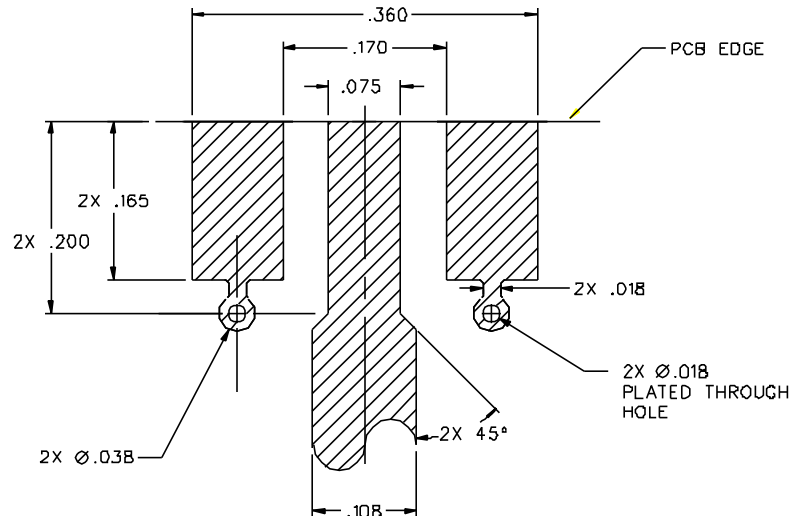

TRACE WIDTH DIMENSIONS

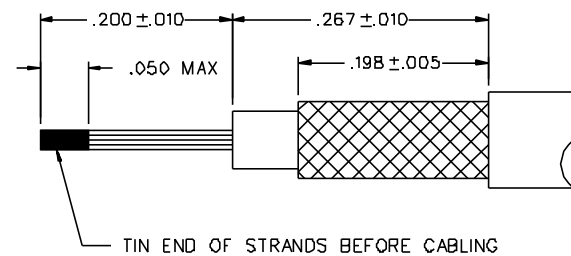

CABLE STRIP DIMENSIONS

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

NOTES:

1. SPECIFICATIONS:

CABLE ACCEPTABILITY: RG 58/U, RG 141/U, RG 303/U
CABLE HEX CRIMP SIZE: 213
CABLE RETENTION: 40 LBS OR CABLE BREAKING STRENGTH
IMPEDANCE: 50 OHMS

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY KAS	DATE 5/19/98	JOHNSON [®] Cinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256	TITLE CABLE TERMINATION, .068 END LAUNCH, RG 58
DECIMALS .XX	mm	CHECKED BY KAS	DATE 8-27-98		
.XXX ± .003		APPROVED BY TAK	DATE 9-9-98	CODE NO.	DRAWING NO. C - 142-0007-801/810
MATL		APPROVED BY RJB	DATE 9-11-98		
FINISH		RELEASE DATE		SCALE 10:1	U/M INCH SHEET 2 OF 2