

NOTES:

1. MATERIAL & FINISH:

1.1. BODY, COUPLING NUT & END PLUG: PASSIVATED STAINLESS STEEL

1.2. DIELECTRIC: PTFE (TEFLON)

1.3. CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

1.4. GASKET: SILICONE RUBBER
2. SPECIFICATIONS:

2.1. FREQUENCY RANGE: DC TO 18 GHz


2.2. INPUT POWER (MAX): 2 WATTS AVERAGE AT +25°C, DERATED LINEARLY TO 0.5 WATTS AT +125°C

2.3. VSWR (MAX): 1.05+0.01f (GHz)

2.4. IMPEDANCE: 50 OHMS NOMINAL

2.5. OPERATING TEMPERATURE RANGE: -55°C TO +125°C

TYPE N MALE
PER MIL-STD-348
FIGURE 304-1

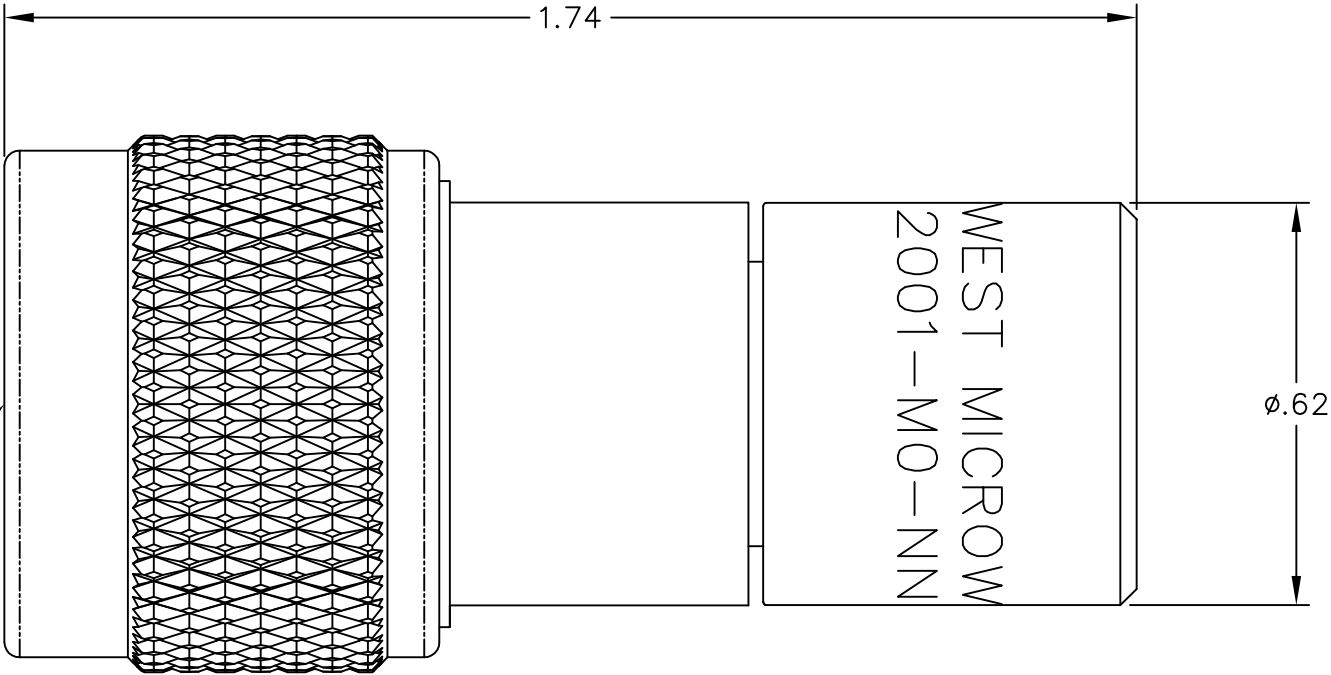

MODEL NUMBER
TRM-2001-MO-NN-02

REV.	DESCRIPTION	DATE
-	RELEASED	3/21/79
A	ECR 6545	6/27/89
B	ECN 12868	8/23/93
C	ECN 13621	5/19/94
H	ECO 58152	3/9/22



NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE		TITLE	
34078		MIDWEST MICROWAVE	
		TERMINATION TYPE N MALE	
DRAWN/DATE A.BEATTY 7/31/91	ENG./DATE G.KOZAK 7/31/91	DRAWING NUMBER TRM-2001-MO-NN-02-01	REV. H
CHECKED/DATE	APPROVED/DATE	SCALE: 2:1	SHEET 1 of 1