

NOTES:

1.0 ELECTRICAL SPECIFICATIONS

1.1 FREQUENCY RANGE: DC to 4.0 GHz.

1.2 MAX. INPUT POWER:

2 WATTS AVERAGE AT +25°C DERATED  
LINEARLY TO 0.5 WATTS AT +125°C.

1.3 OPERATING TEMP. RANGE: -54°C to +125°C.

1.4 IMPEDANCE: 50 OHMS.

1.5 VSWR (MAX.): 1.20:1

1.6 PEAK POWER:

0.25 KILOWATT (5 MICROSECOND PULSE WIDTH).


2.0 MARKING

2.1 MARK UNIT AS SHOWN:

(REF: INK-02638-27-02)

3.0 DIMENSIONS IN PARENTHESIS ARE

MILLIMETERS.

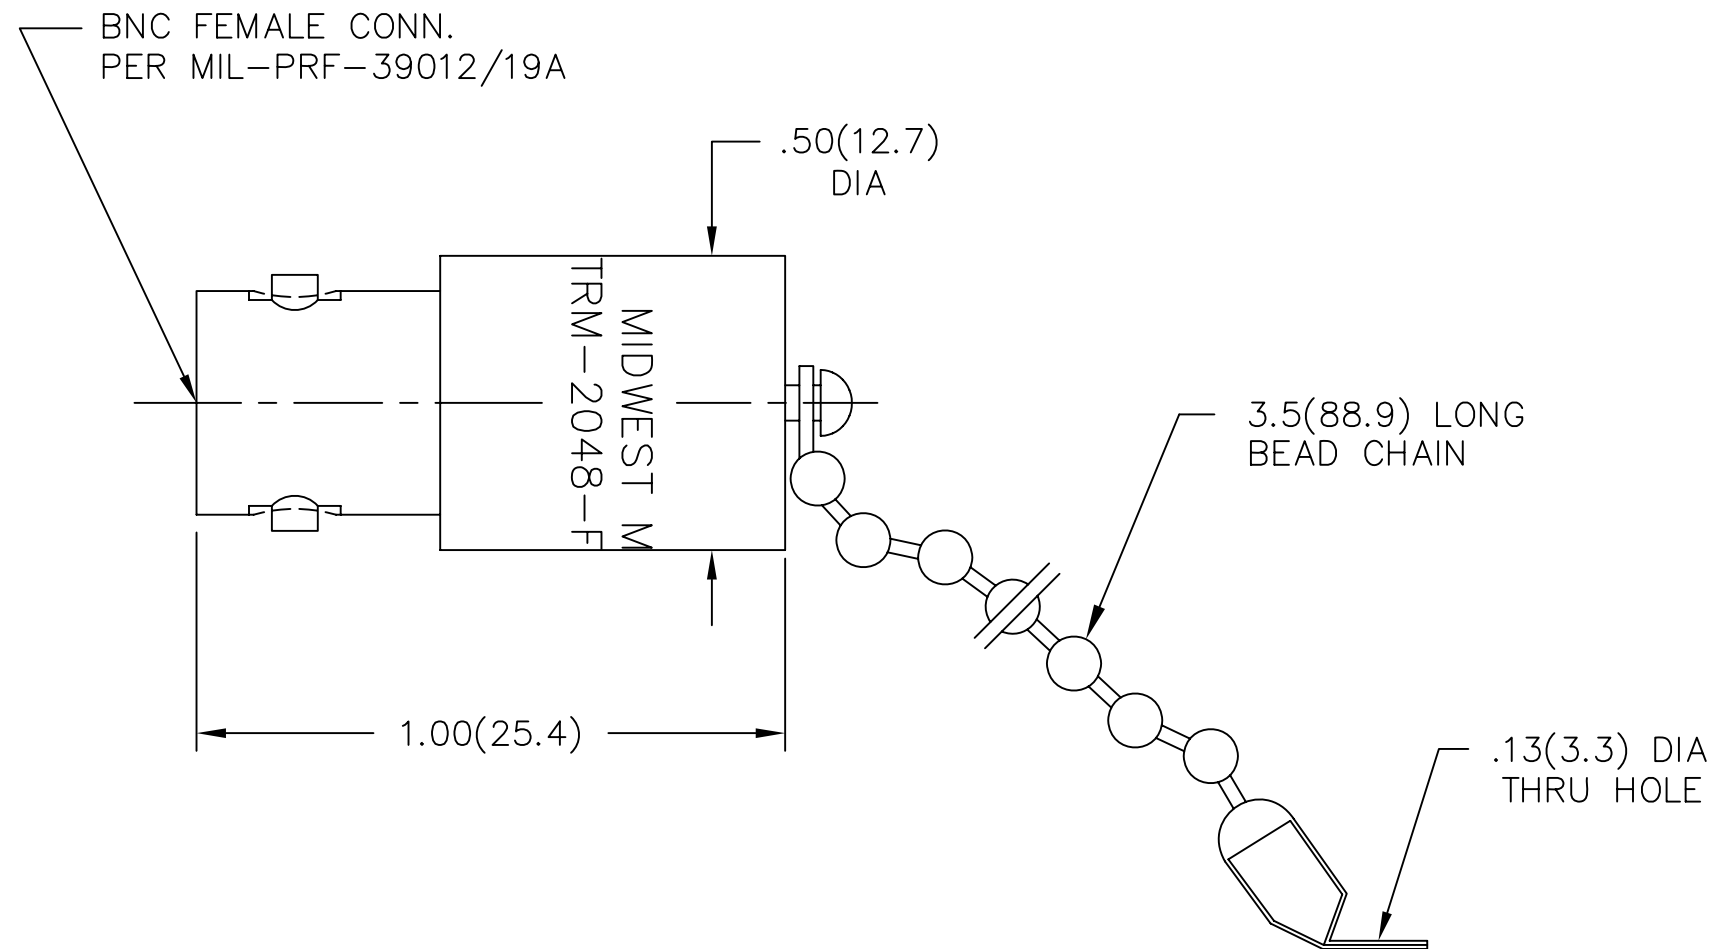

MODEL NUMBER	TRM-2048-FC-BNC-10
REV.	B1

REV.	DESCRIPTION	DATE
-	RELEASED	2/20/93
-1	UPDATE MODEL NO.	5/17/91
A	ECN 12414	2/9/93
B	ECN 16884	10/9/98
B1	ADDED TITLEBLOCK	10/26/05

DWG. NO. WAS:  
TRM-2048-FC-000-02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO.	34078 <b>MIDWEST MICROWAVE</b>	
	3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION BNC FEMALE
	DRAWN/DATE M.HOLLMAN 2/9/93	ENG./DATE G.KOZAK 2/19/93	DRAWING NUMBER TRM-2048-FC-BNC-10
	CHECKED/DATE A.BEATTY 2/17/93	APPROVED/DATE	SCALE: 2=1 SHEET 1 of 1