


REV	ECO	DATE
C	13362	5/16/1994
D1	23381	3/14/2011
E	58364	9/1/2022

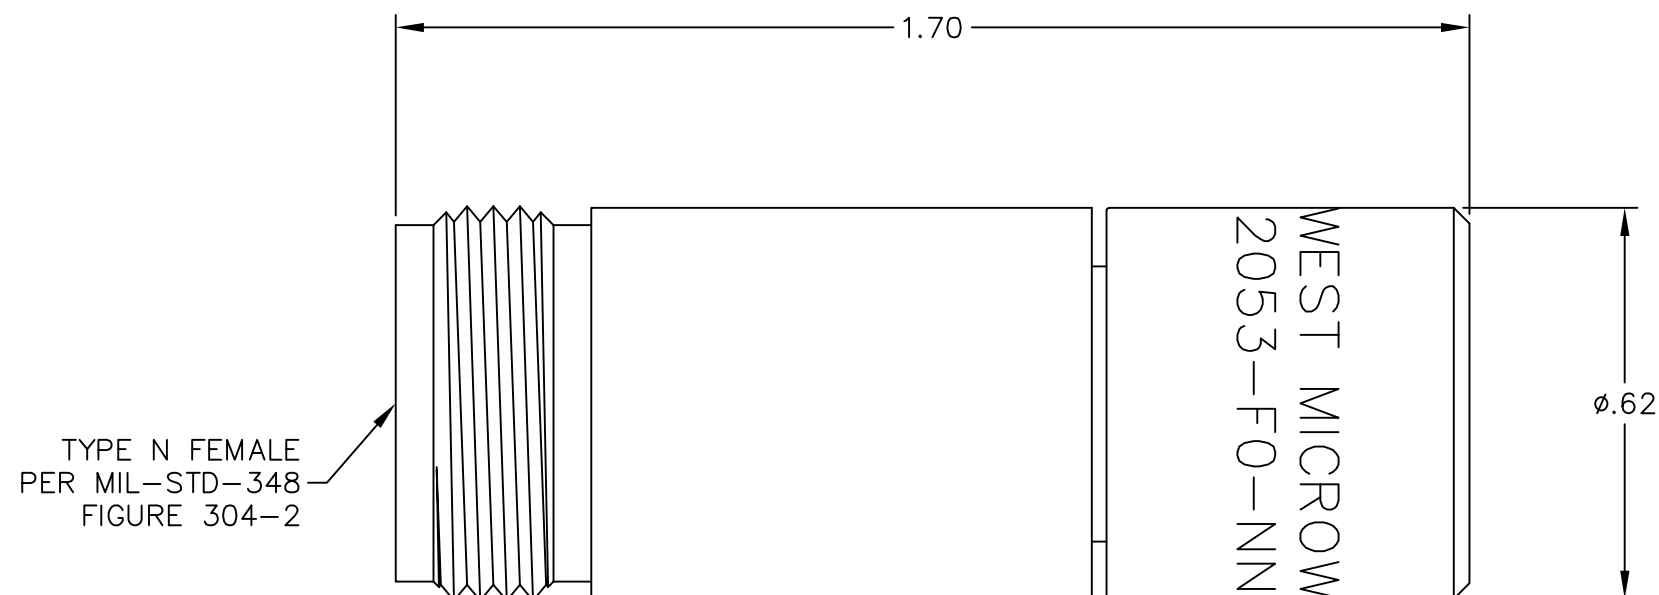


NOTES:

1. MATERIAL & FINISH:

- 1.1. BODY: PASSIVATED STAINLESS STEEL
- 1.2. DIELECTRIC: PTFE (TEFLON)
- 1.3. CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. SPECIFICATIONS:

- 2.1. FREQUENCY RANGE: DC TO 12.4 GHz
- 2.2. INPUT POWER (MAX): 2 WATTS AVERAGE AT +25°C, DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 2.3. VSWR (MAX): $1.05 + 0.01f$ (GHz)
- 2.4. IMPEDANCE: 50 OHMS NOMINAL
- 2.5. OPERATING TEMPERATURE RANGE: -55°C TO +125°C

 NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No.	TRM-2053-F0-NNN-02		MIDWEST MICROWAVE	
	RoHS2	2015/863/EU	Cage Code	34078	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	ANGLES ± 2°	3RD ANGLE PROJECTION		
	Engineer:	J. KEREKES	Date:	9/1/22	SIZE
Title:		TERMINATION TYPE N FEMALE		Drawing No.	TRM-2053-F0-NNN-02-01
Rev.		E		DO NOT SCALE DRAWING	Workmanship Std:
SHEET		1 OF 1			