


REV	ECO	DATE
A	6545	7/6/1989
C	13716	6/23/1994
L	58557	2/24/2023

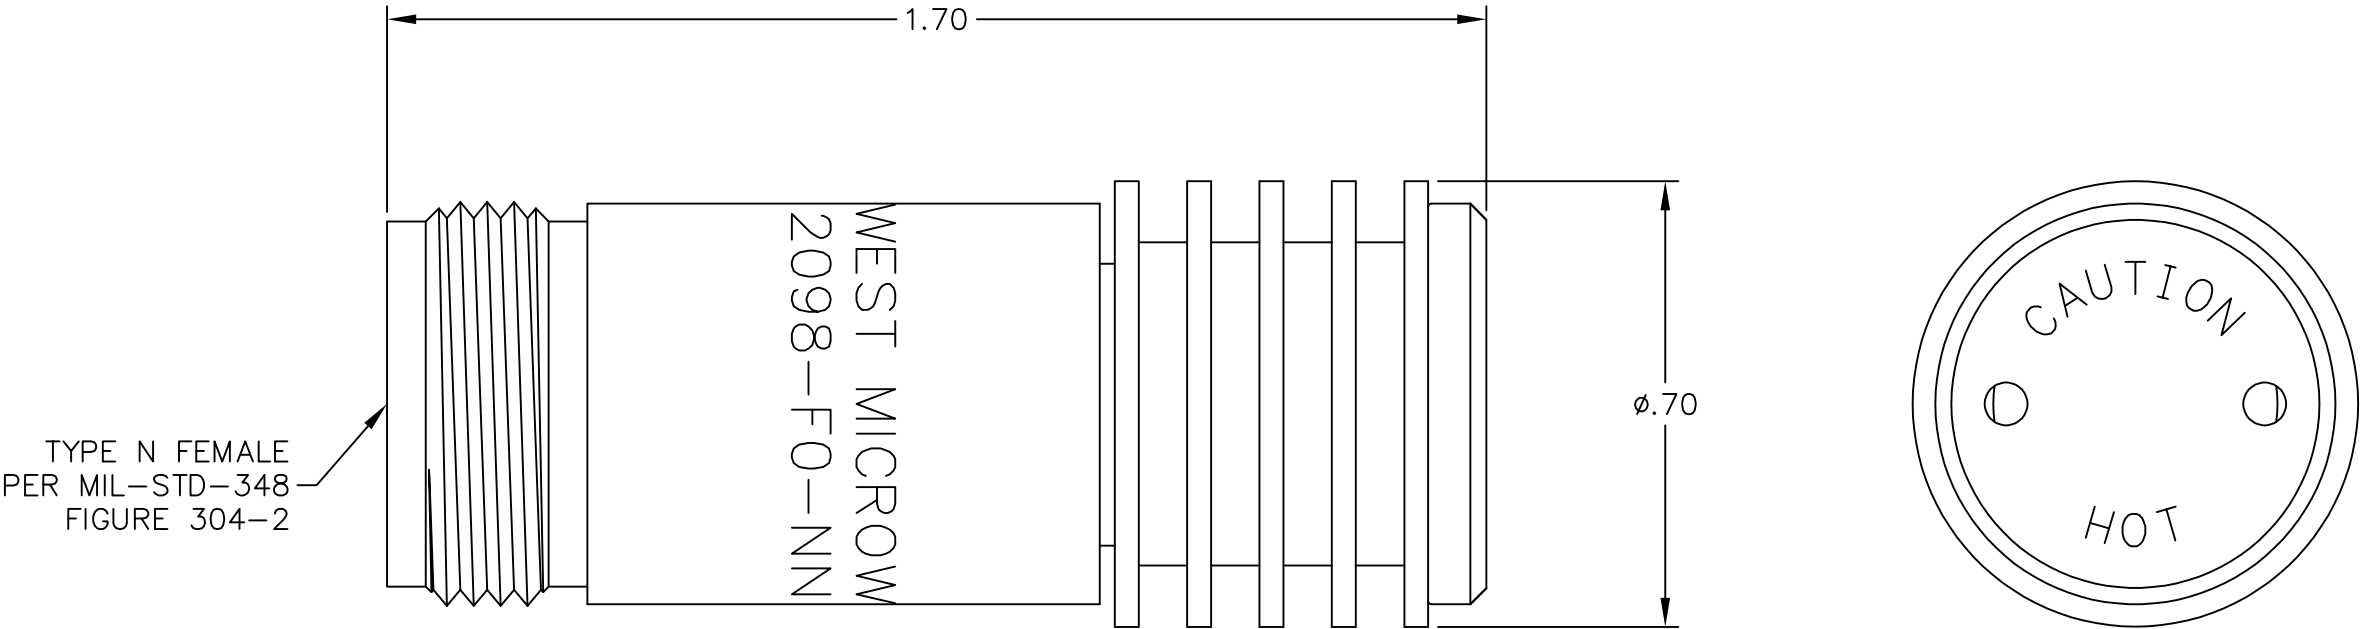

NOTES:

1. MATERIAL & FINISH:
 - 1.1. BODY: PASSIVATED STAINLESS STEEL
 - 1.2. HEAT SINK: BLACK ANODIZED ALUMINUM
 - 1.3. END PLUG: GOLD PLATED BRASS
 - 1.4. DIELECTRIC: PTFE (TEFLON)
 - 1.5. CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
2. SPECIFICATIONS:
 - 2.1. FREQUENCY RANGE: DC TO 18 GHz
 - 2.2. VSWR (MAX): 1.05+0.01f (GHz)
 - 2.3. INPUT POWER:
 - 2.3.1. AVERAGE: 10 WATTS AT +25°C, DERATED LINEARLY TO 1 WATT AT +125°C
 - 2.3.2. PEAK: 250 WATTS
 - 2.4. IMPEDANCE: 50 OHMS NOMINAL
 - 2.5. OPERATING TEMPERATURE RANGE: -54°C TO +125°C

 NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No. TRM-2098-F0-NNN-07		MIDWEST MICROWAVE	
	RoHS2 ☒ 2015/863/EU		Title: TERMINATION TYPE N FEMALE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .02 .XXX ± .005 ANGLES ± 2°		Drawing No. TRM-2098-F0-NNN-07-01	
	Date: 2/24/23		SIZE A	DO NOT SCALE DRAWING