MODEL NUMBER
TRM-2191-MO-BMA-02

NOTES:

1.0 SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC TO 18.0 GHz

1.2 MAXIMUM INPUT POWER: 0.5 WATTS AT +25°C
DERATED LINEARLY TO 0 WATTS AT +125°C

1.3 MAXIMUM VSWR: 1.10 + 0.01(F GHz)

1.4 IMPEDANCE: 50 OHMS NOMINAL

1.5 TEMPERATURE RANGE: −65°C TO +125°C

2.0 MATERIAL & FINISH:

2.1 BODY AND END PLUG: PASSIVATED STAINLESS STEEL

2.2 DIELECTRIC: PTFE (TEFLON)

2.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2.4 O-RING: SILICONE RUBBER

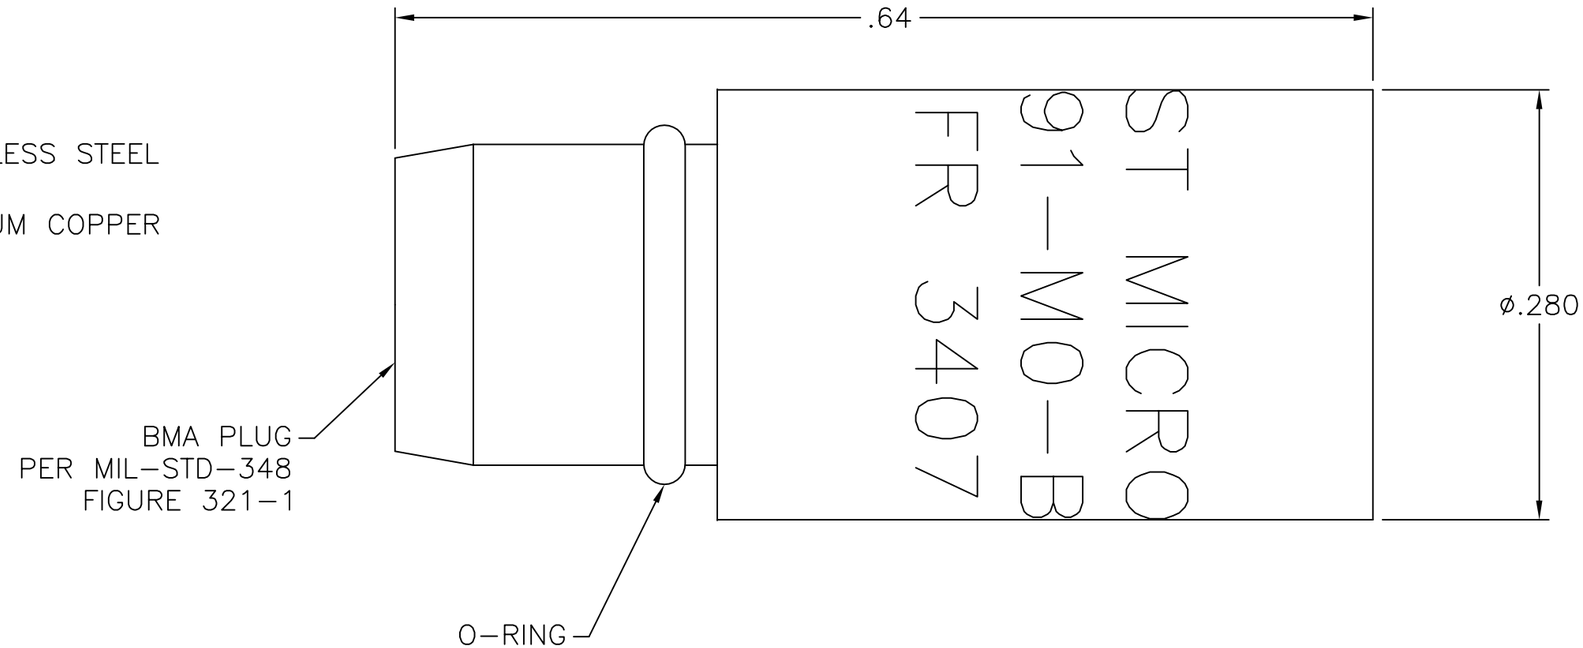

REV.	DESCRIPTION	DATE
–	RELEASED	4/25/97
A	ECN 16724	6/18/98
A1	ADDED TITLEBLOCK	11/14/05
C	ECO 23176	1/5/11
D	ECO 24974	1/3/14

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078

MIDWEST MICROWAVE

EMERSON Network Power
Connectivity Solutions

TITLE
TERMINATION – BMA MALE
OUTLINE DRAWING

DRAWN/DATE	ENG./DATE
C. WALLACE 1/27/14	J. KEREKES 1/3/14
CHECKED/DATE	APPROVED/DATE
J. KEREKES 1/28/14	J. KEREKES 1/28/14

DRAWING NUMBER TRM-2191-MO-BMA-02-01 REV. D

SCALE: 10:1 SHEET 1 of 1

Please read our datasheet & drawing disclaimer here.