MODEL NUMBER
TRM-2193-FO-BMA-02

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC to 18 GHz

1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C

1.3 OPERATING TEMP. RANGE: −65°C to +125°C

1.4 IMPEDANCE: 50 OHMS

1.5 VSWR: 1.10 +0.01F(GHz)

2.0 MARKING: NONE REQUIRED

3.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

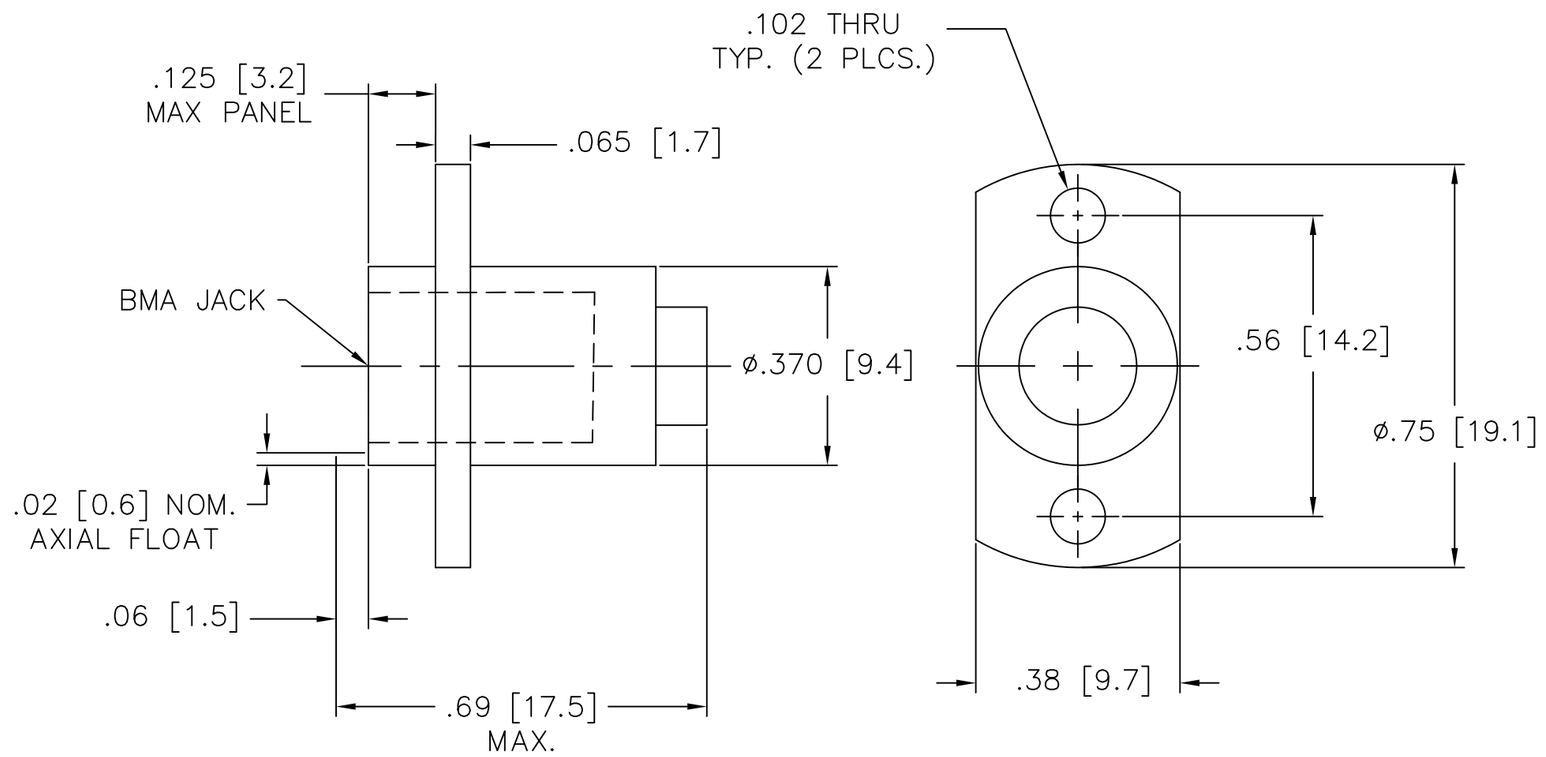

REV.	DESCRIPTION	DATE
–	RELEASED	4/19/00
B	ECO 22514	7/28/10
B1	ECO 23515	4/28/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078

MIDWEST MICROWAVE

EMERSON Network Power
Connectivity Solutions

TITLE
TERMINATION
OUTLINE DRAWING

DRAWN/DATE	ENG./DATE
M. STAFFORD 4/13/00	G.KOZAK 4/19/00
CHECKED/DATE	APPROVED/DATE

DRAWING NUMBER TRM-2193-FO-BMA-02-01 REV. B1

SCALE: 3:1 SHEET 1 of 1

Please read our datasheet & drawing disclaimer here.