DASH NUMBER	MODEL NUMBER	LETTER CODE	IMPD Ω	A DIA	B DIM	C DIM	D DIM	E DIA
-1	CBBJR26	------	50	.046	.24	.090	.050	.0625
-2	UCBBJR26		75	.029				
-3	CBBJR26A	A	50	.046	.34	.090	.058	.070
-4	UCBBJR26A		75	.029				

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC., AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
E	REVISED PER ECO 16623	7-18-08	ORamon

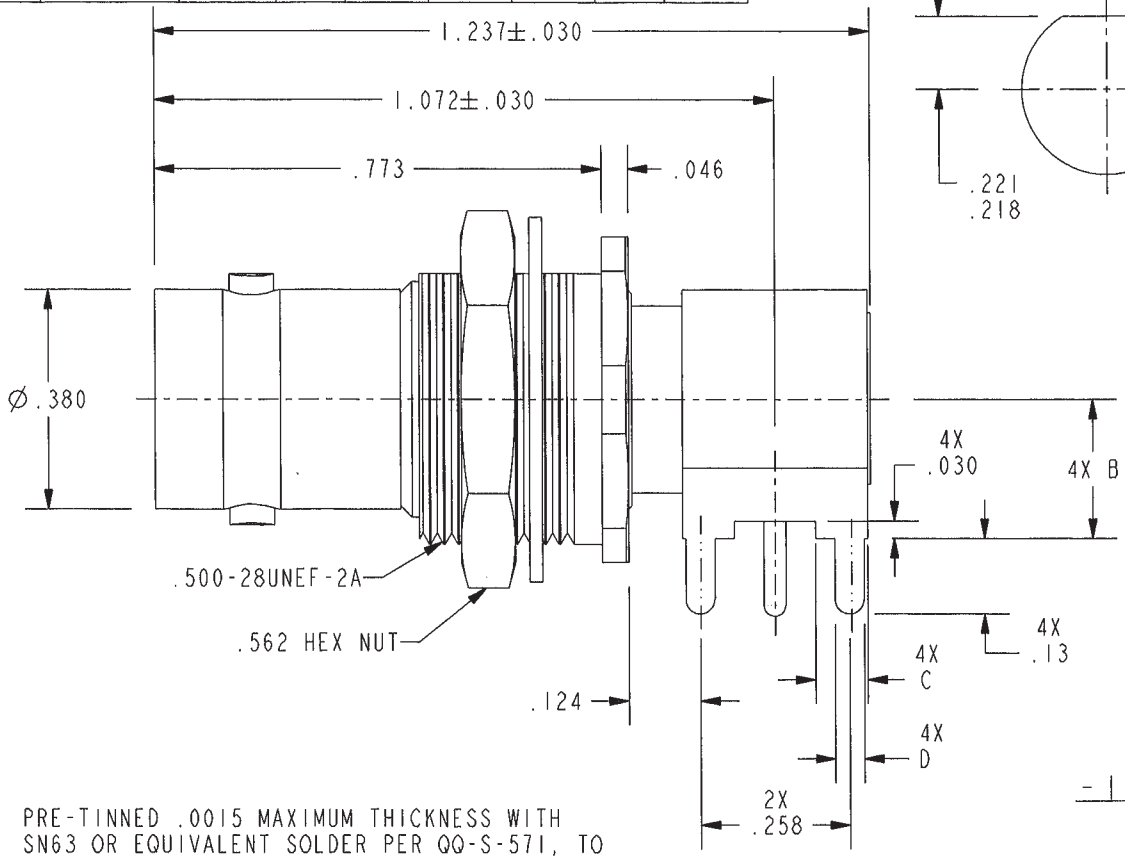



RECOMMENDED PANEL CUTOUT
SCALE 2/1



SCALE 1/1

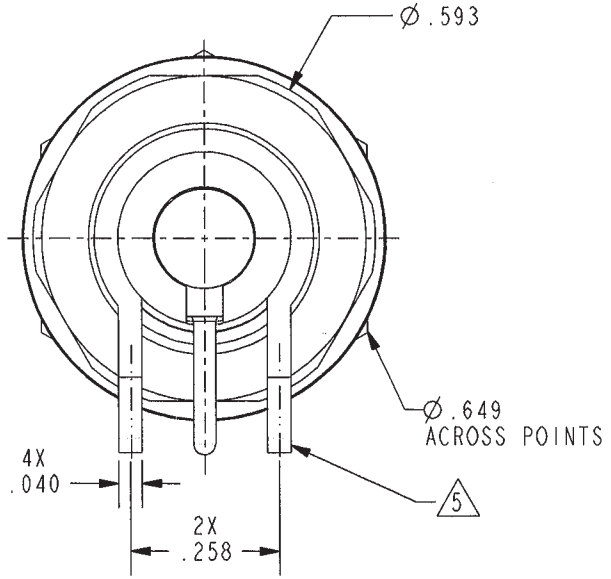

-1 SHOWN

RED INDICATES ORIGINAL

5 PRE-TINNED .0015 MAXIMUM THICKNESS WITH SN63 OR EQUIVALENT SOLDER PER QQ-S-571, TO WITHIN .060 MAXIMUM OF SHOULDER AFTER PLATING

4. MAXIMUM PANEL THICKNESS .156

3. EXAMPLE OF COMPLETE MODEL NUMBER:
   CBBJR26 A
   BASIC MODEL NUMBER — LETTER CODE

2. FINISH: TFS-1A (NICKEL)

1. 50 & 75 Ω RIGHT ANGLE CIRCUIT BOARD AND INSULATED BULKHEAD MOUNTING BNC RECEPTACLE

NOTES: UNLESS OTHERWISE SPECIFIED.

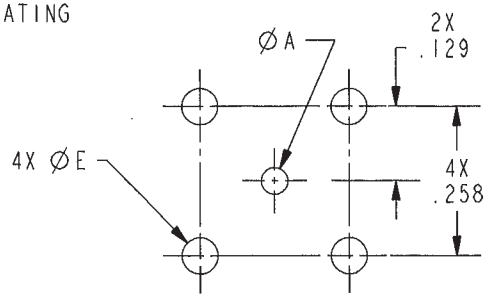

RECOMMENDED MTG HOLE PATTERN
SCALE 3/1

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
ANGLE ± 1°

DRN N JOHNSON 5-15-08
CHK gm 6-23-08
QUALITY
MANUF
APPROVED 7/17/08

MATERIAL:
FINISH:

TROMPETER RF connectivity
a cinch connectivity solutions brand

TITLE: U/CBBJR26/A

SIZE A | CAGE CODE 14949 | DRAWING NO. 1-0053 | REV. E

NEXT ASSY
PRO/E FILE NO. 1-0053
DO NOT SCALE DWG
SCALE 3/1
DATE 10-30-84
SHEET 1C

Please read our datasheet & drawing disclaimer here