


NOTES:

1. MATERIAL & FINISH:
- 1.1 HOUSING & COUPLING NUT: TRI-ALLOY PLATED BRASS
  - 1.2 CENTER CONTACT: GOLD PLATED BRASS
2. SPECIFICATIONS:
- 2.1 FREQUENCY RANGE: DC TO 6 GHz
  - 2.2 IMPEDANCE: 50 OHMS NOMINAL
  - 2.3 VSWR (MAX): 1.25:1
  - 2.4 INPUT POWER (MAX): 2 WATTS AT +25°C
  - 2.5 OPERATING TEMP. RANGE: -55°C TO +85°C

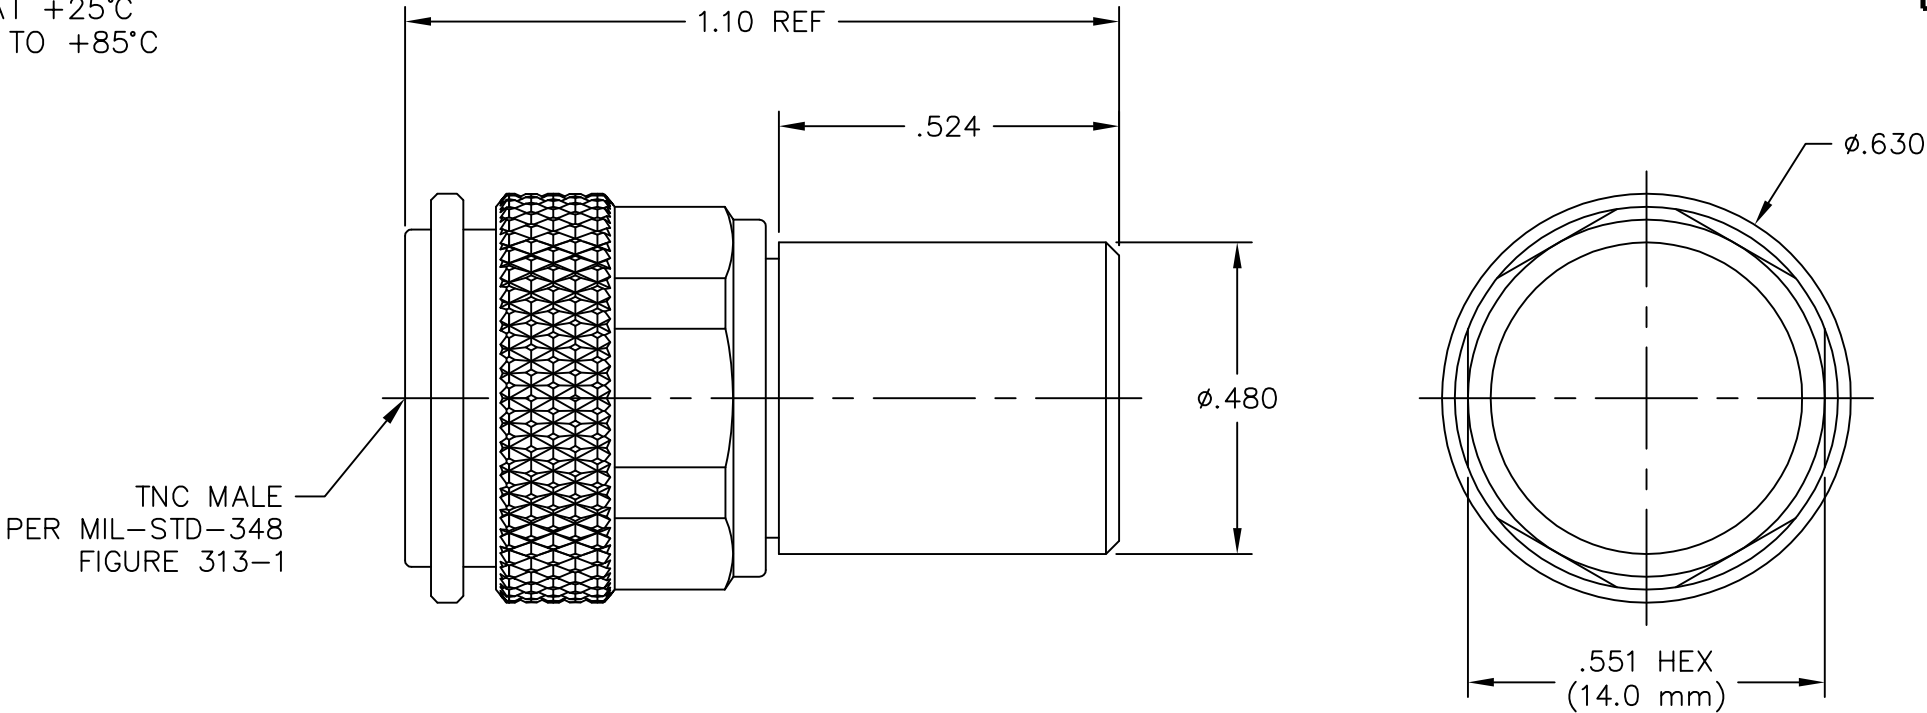

MODEL NUMBER  
CGT-1060-M0-TNC-34

| REV. | DESCRIPTION | DATE    |
|------|-------------|---------|
| 001  | ECO 58167   | 2/24/22 |



NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.

UNLESS OTHERWISE NOTED  
DIMENSIONS ARE IN INCHES  
AND TOLERANCES ARE:  
3 PLACE DECIMALS ±.005  
2 PLACE DECIMALS ±.02  
FRACTIONS ±1/64  
PARALLELITY: T.I.R. \_\_\_\_\_  
FLATNESS: T.I.R. \_\_\_\_\_  
CONCENTRICITY: T.I.R. \_\_\_\_\_  
ANGLES AND PERPENDICULARITY: ±2°

|                                                                                       |                                       |                                                   |              |
|---------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------|--------------|
| CAGE CODE<br><b>34078</b>                                                             |                                       | <b>MIDWEST MICROWAVE</b>                          |              |
|  |                                       | TITLE<br><br>TNC TERMINATION<br>2 WATTS, DC-6 GHz |              |
| DRAWN/DATE<br>J. KEREKES<br>2/24/22                                                   | ENG./DATE<br>J. KEREKES<br>2/24/22    | DRAWING NUMBER<br>CGT-1060-M0-TNC-34-01           | REV.<br>001  |
| CHECKED/DATE                                                                          | APPROVED/DATE<br>M. DVORAK<br>2/24/22 | SCALE: 4: 1                                       | SHEET 1 of 1 |