
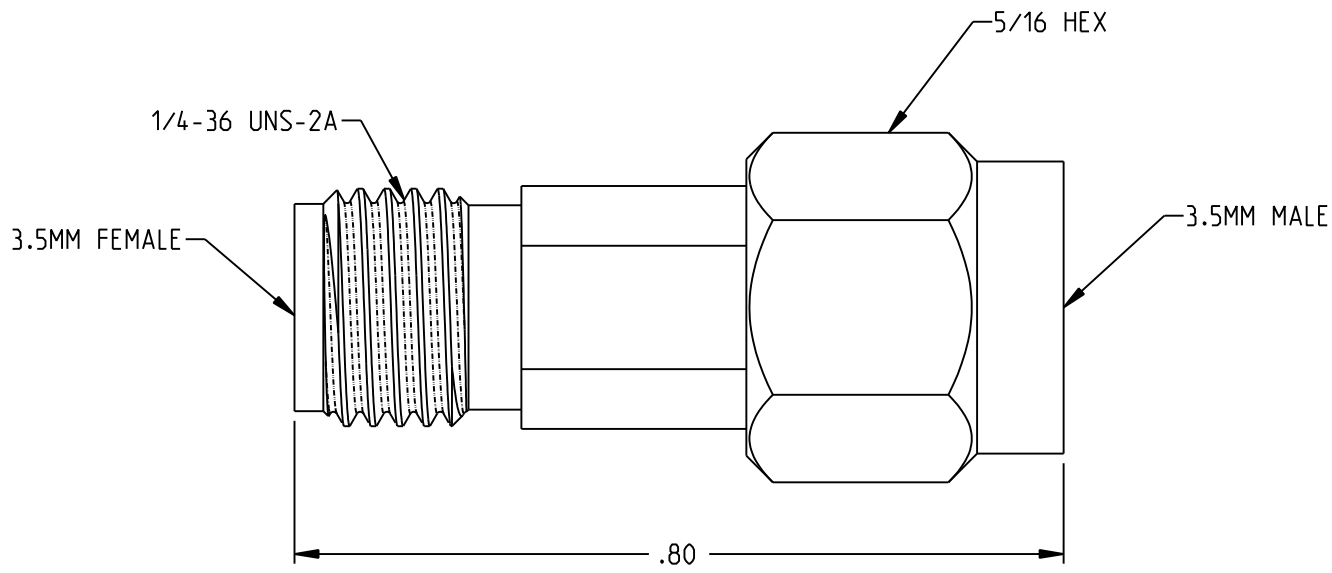


REV	ECO	DATE
001	59207	08/12/2024



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
 - 1.1 BODY: PASSIVATED STAINLESS STEEL
 - 1.2 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
 - 1.3 INSULATOR: ULTEM
2. SPECIFICATIONS:
 - 2.1 FREQUENCY RANGE: DC-26.5 GHz
 - 2.2 IMPEDANCE: 50 OHMS NOMINAL
 - 2.3 VSWR (MAX): 1.15:1
 - 2.4 OPERATING TEMPERATURE: -65°C TO 125°C

3. ALL DIMENSIONS ARE FOR REFERENCE ONLY

 <small>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</small>	Model No:	CGM-1260-MF-35M-02		MIDWEST MICROWAVE	
	RoHS2	<input checked="" type="checkbox"/>	Cage Code	34078	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		3RD ANGLE PROJECTION	Title: 3.5MM FEMALE TO MALE ADAPTOR	
	ENGINEER:	A. PETERS		Drawing No.	CGM-1260-MF-35M-02-01
	Date:	08/12/2024	Size	A	DO NOT SCALE DRAWING
			Workmanship Std:		Sheet 1 OF 1