


TABLE 1	
MODEL NUMBER	LENGTH
415-0529-006	6.00±.15
415-0529-012	12.00±.25
415-0529-018	18.00±.25
415-0529-024	24.00±.25
415-0529-036	36.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	5/23/2022
2	EC-2312003	12/04/2023

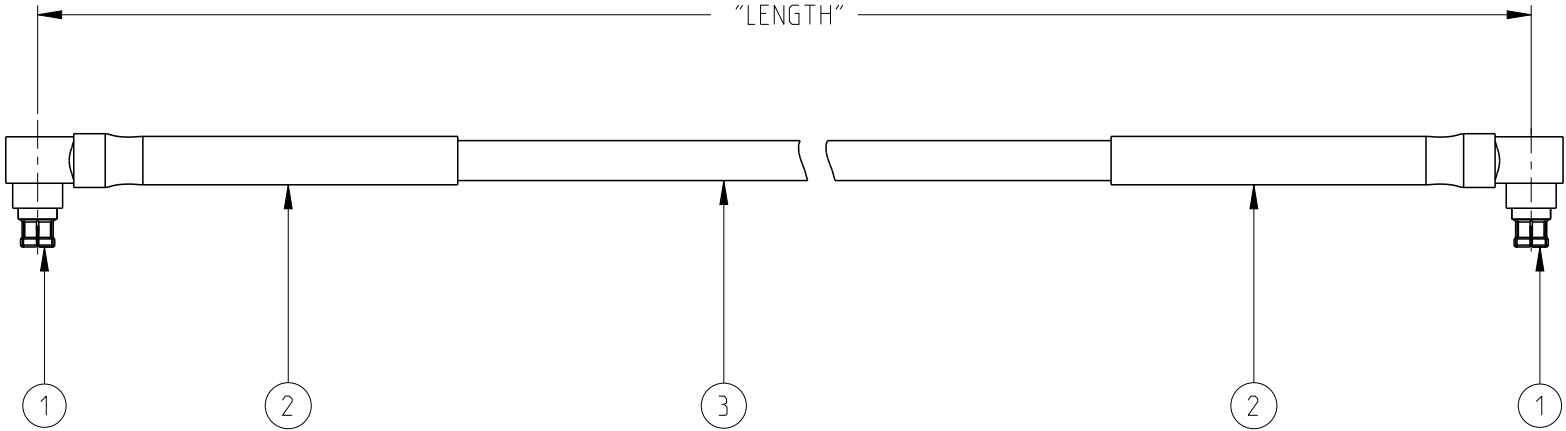

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMPM RA FEMALE
2	2X 1.00±.10	HEAT SHRINK TUBING
3	AR	CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
- CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
- VSWR: 1.50 TYPICAL DC-30GHz.

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0529-001/999		JOHNSON			
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	Title: CABLE ASSY, SMPM RA FEMALE TO SMPM RA FEMALE, .086" FLEXIBLE				
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		Drawing No.		REV.		
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by: ROMAN YAO	415-0529-001/999		2		
	Date: 5/23/2022	Size A	DO NOT SCALE DRAWING	Workmanship Std/Sheet NONE	1 OF 1		