MODEL NUMBER	"A"	"B"
BJ376	—	5/8
BJ376S	.042	11/16

REV	ECO	DATE
G	11466	1/17/1996
H	13617	11/7/2000
J	58988	6/27/2025

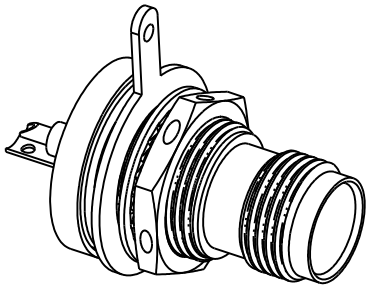

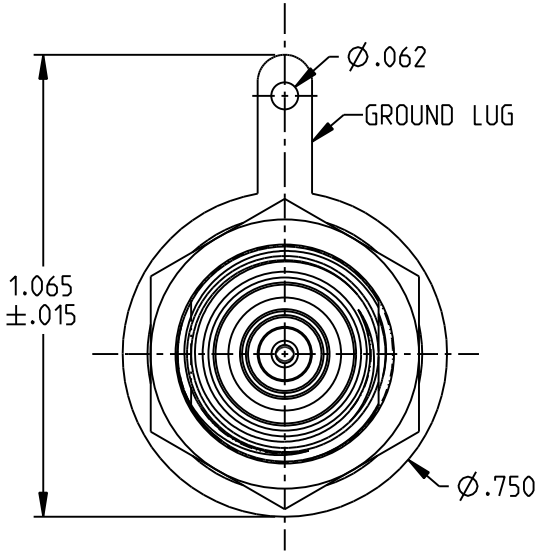

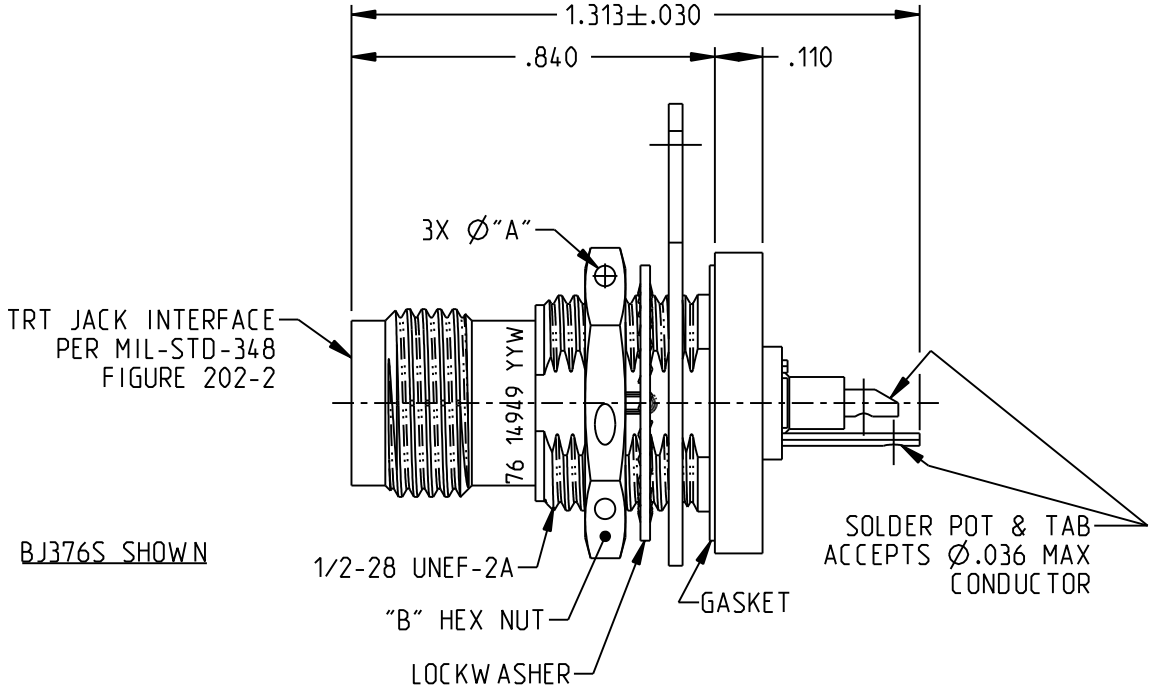

BJ376S SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED:

1. MATERIAL & FINISH:
   1.1 BODY: NICKEL PLATED BRASS
   1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
   1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
   1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.5 MOUNTING HARDWARE: NICKEL PLATED COPPER ALLOY
   1.6 GASKET: SILICONE RUBBER

2. ELECTRICAL:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: NON-CONSTANT

3. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

4. PANEL THCKNESS (MAX): .208



RECOMMENDED
PANEL CUTOUT

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

Model No: BJ376X

RoHS2 ☑ 2015/863/EU

Cage Code 14949

3RD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

ENGINEER: C.MONAHAN

Date: 6/27/2025

TROMPETER

Title: TRT BULKHEAD JACK, SOLDER POT, REAR MOUNT

Drawing No. 3-0131 REV. H

Size A | DO NOT SCALE DRAWING | Workmanship Std: TFS-4 | Sheet 1 OF 1

Please read our datasheet & drawing disclaimer here.