| MODEL NUMBER | INTERFACE SPEC | IMPD (OHMS) | Ø"A" | Ø"B" | "C" |
|---|---|---|---|---|---|
| CBJR20 | MIL-STD-348, FIG. 301-2 | 50 | .046 | .0625 ±.0010 | .24 |
| UCBJR20 | MIL-STD-348, FIG. 330-1 | 75 | .029 | | |
| CBJR20A | MIL-STD-348, FIG. 301-2 | 50 | .046 | .070 ±.001 | .34 |
| UCBJR20A | MIL-STD-348, FIG. 330-1 | 75 | .029 | | |

| REV | ECO | DATE |
|---|---|---|
| G | 7636 | 8/24/1987 |
| H | 9449 | 10/2/1991 |
| J | 57203 | 1/11/2019 |

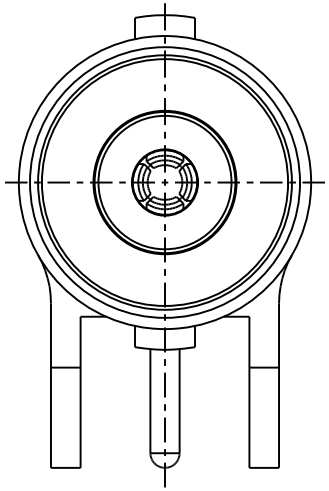

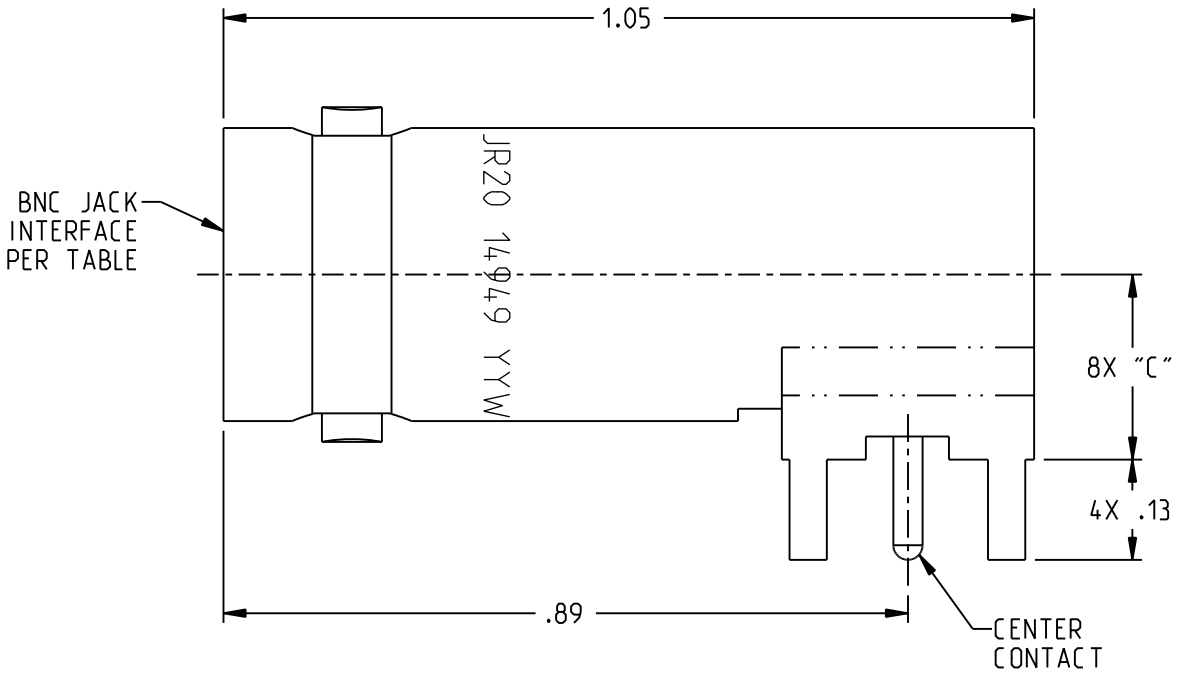


CBJR20 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIALS AND FINISH:
   1.1 BODY: TIN PLATED BRASS
   1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
   1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. ELECTRICAL:
   2.1 IMPEDANCE: SEE TABLE
   2.2 FREQUENCY (MAX): 4 GHz

RECOMMENDED MTG HOLE PATTERN

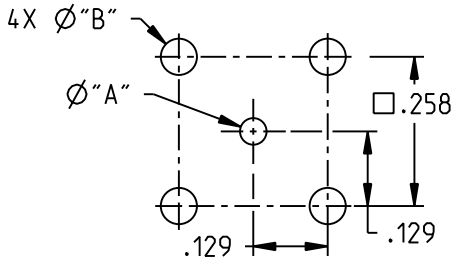


NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

Model No: XCBJR20X
RoHS2 ☑ 2011/65/EU
UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°
Cage Code 14949
3RD ANGLE PROJECTION
ENGINEER: C.MONAHAN
Date: 3/19/2026

TROMPETER

Title: BNC JACK, CIRCUIT BOARD MOUNT, RIGHT ANGLE
Drawing No. C_1-0044
REV. J
Size A | DO NOT SCALE DRAWING | Workmanship Std: TFS-4 | Sheet 1 OF 1

Please read our datasheet & drawing disclaimer here.